
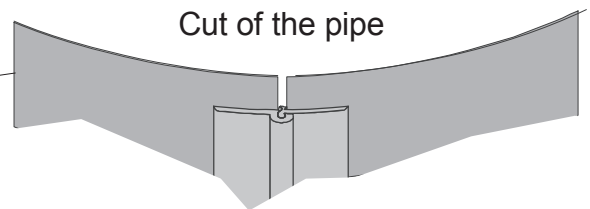


GB


Exhaust Ø800

Assembly instruction - Exhaust

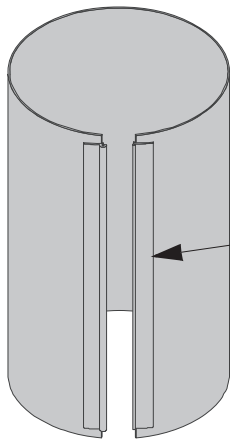


Cut of the pipe

Click the two rolling junctions together

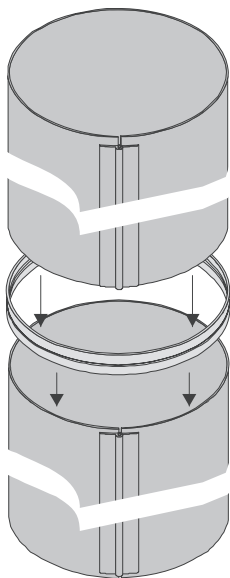

Push the sleeve down the pipe, and fasten it with 8 pcs. of sheet metal screws 4,8x16 (N136-121) and washers 5,3x15 stainless (02-420). Then push the next pipe into the sleeve and fasten with 8 pcs. of sheet metal screws 4,8x16 (N136-121) and washers 5,3x15 stainless (02-420).

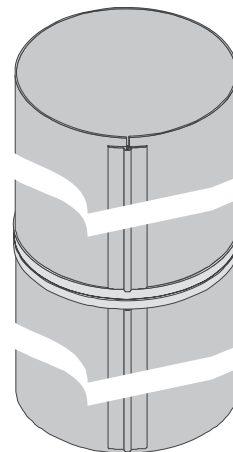

Assembles pipes

2
■


Mount 4 pcs. motor fittings inside the pipe in rough-bored holes

Motor suspension




Cut of the pipe

Fasten the fan on the shaft

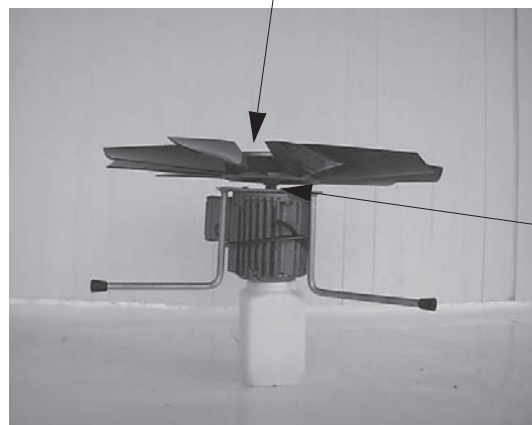


Mount the flange on the motor with 4 set screw 6x16


Mount the exhaust on one side of the roof

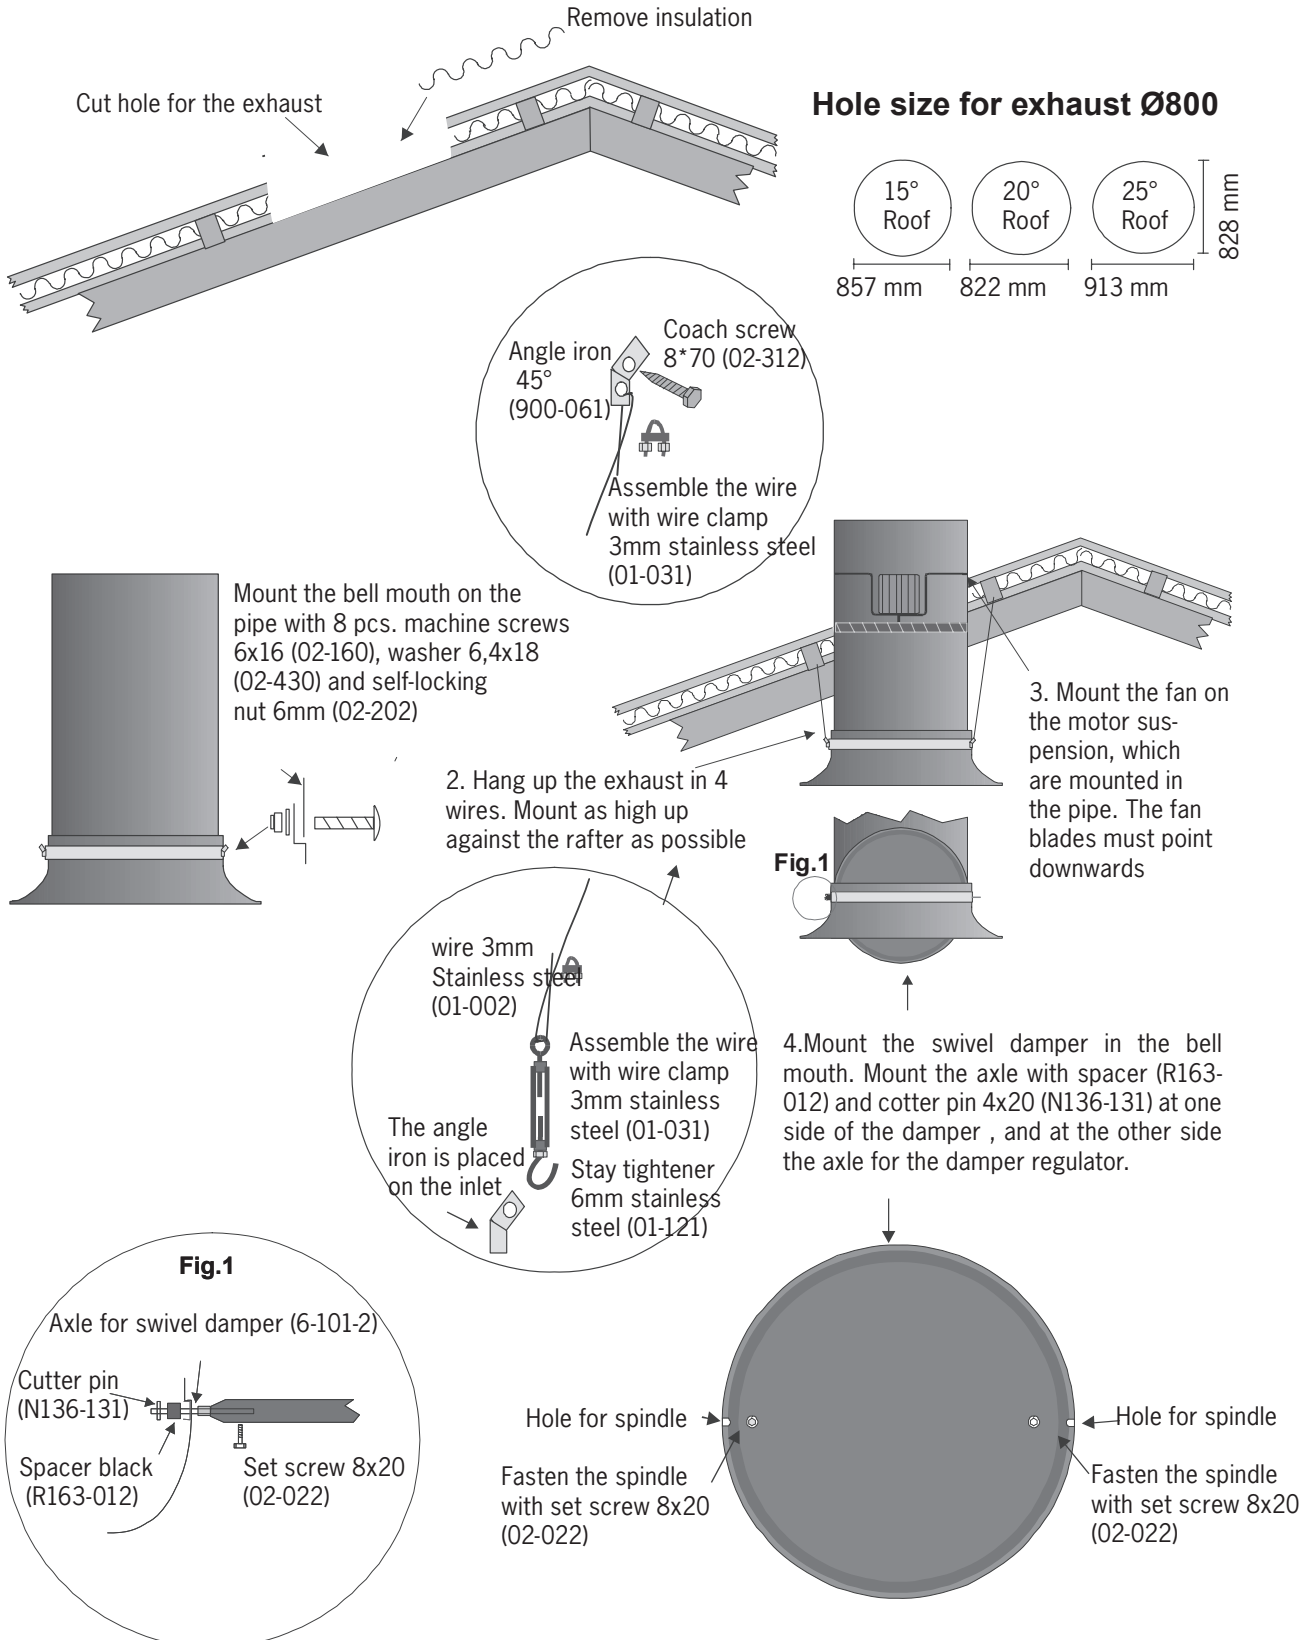


Mounting the exhaust in the ridge

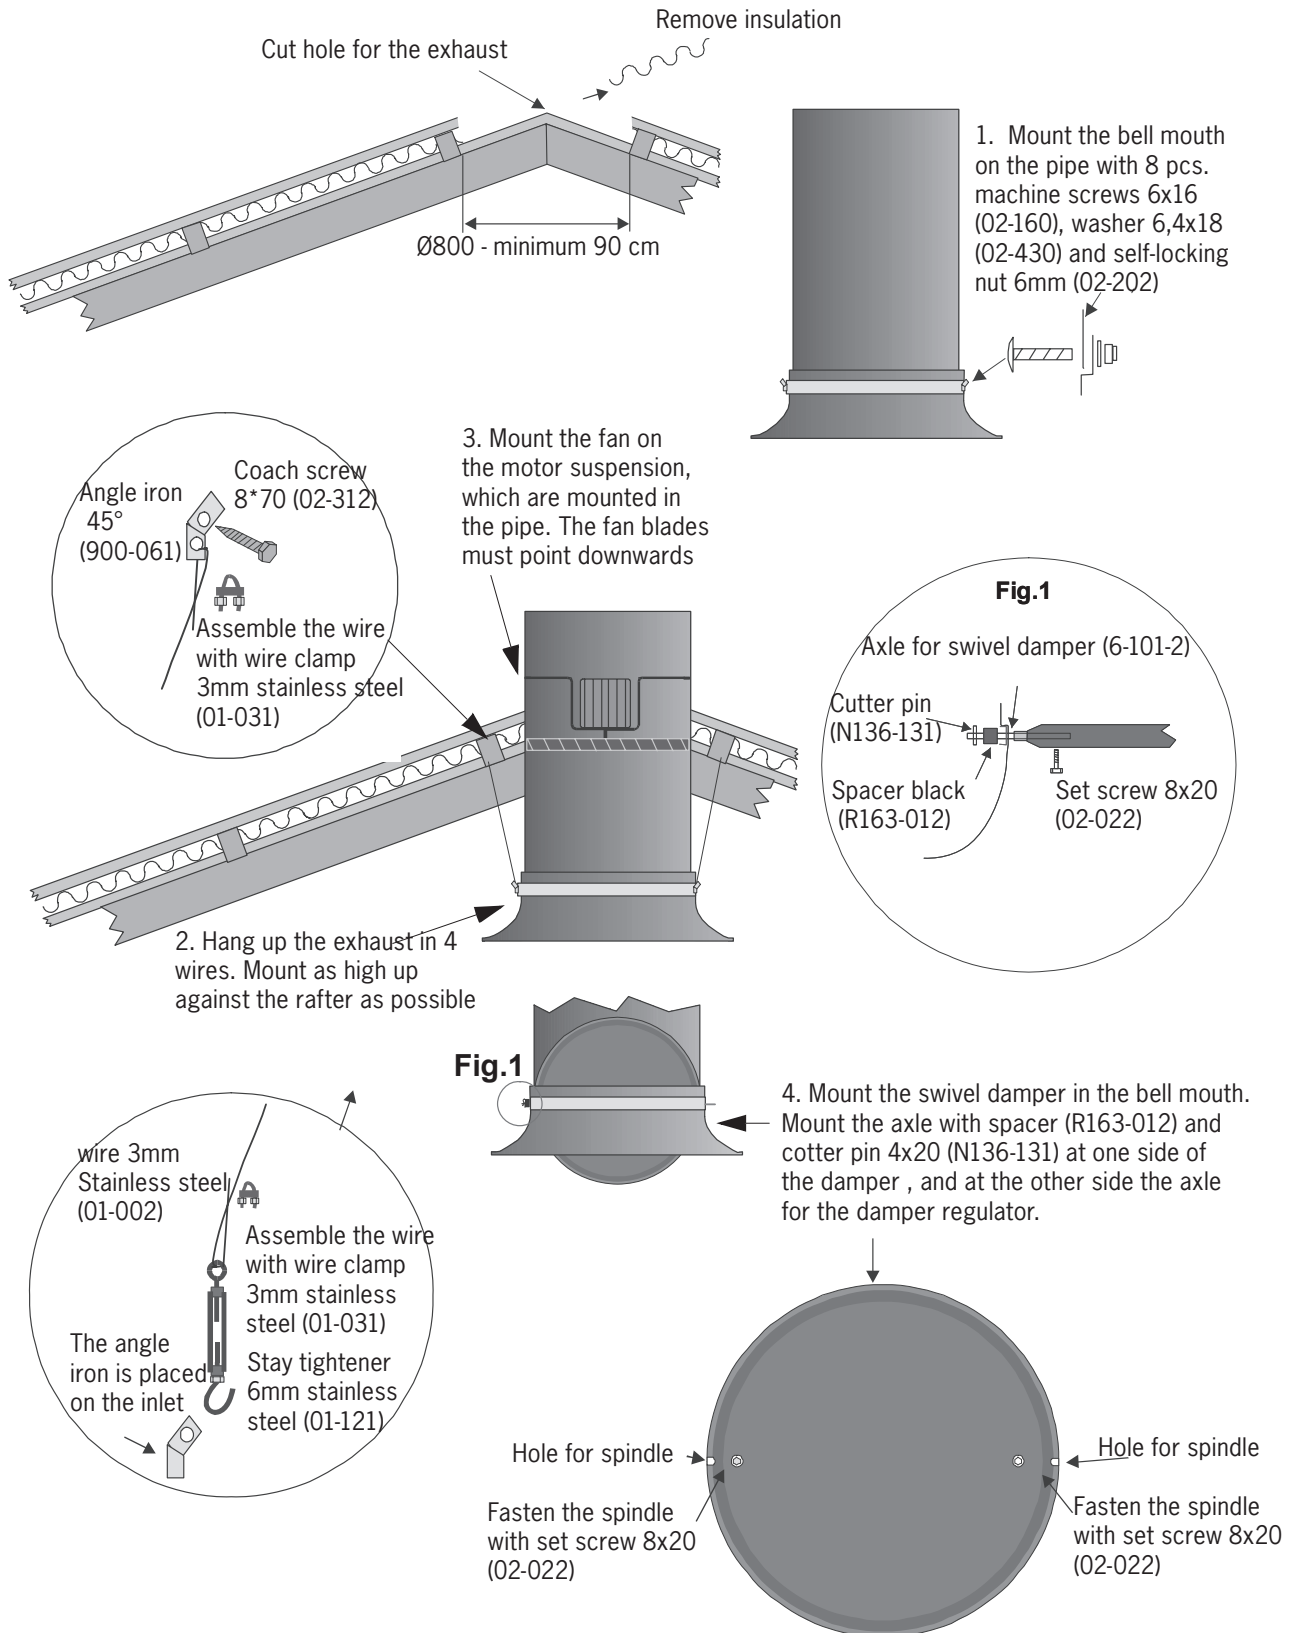

Mounting the exhaust on one side of the roof - through the loft

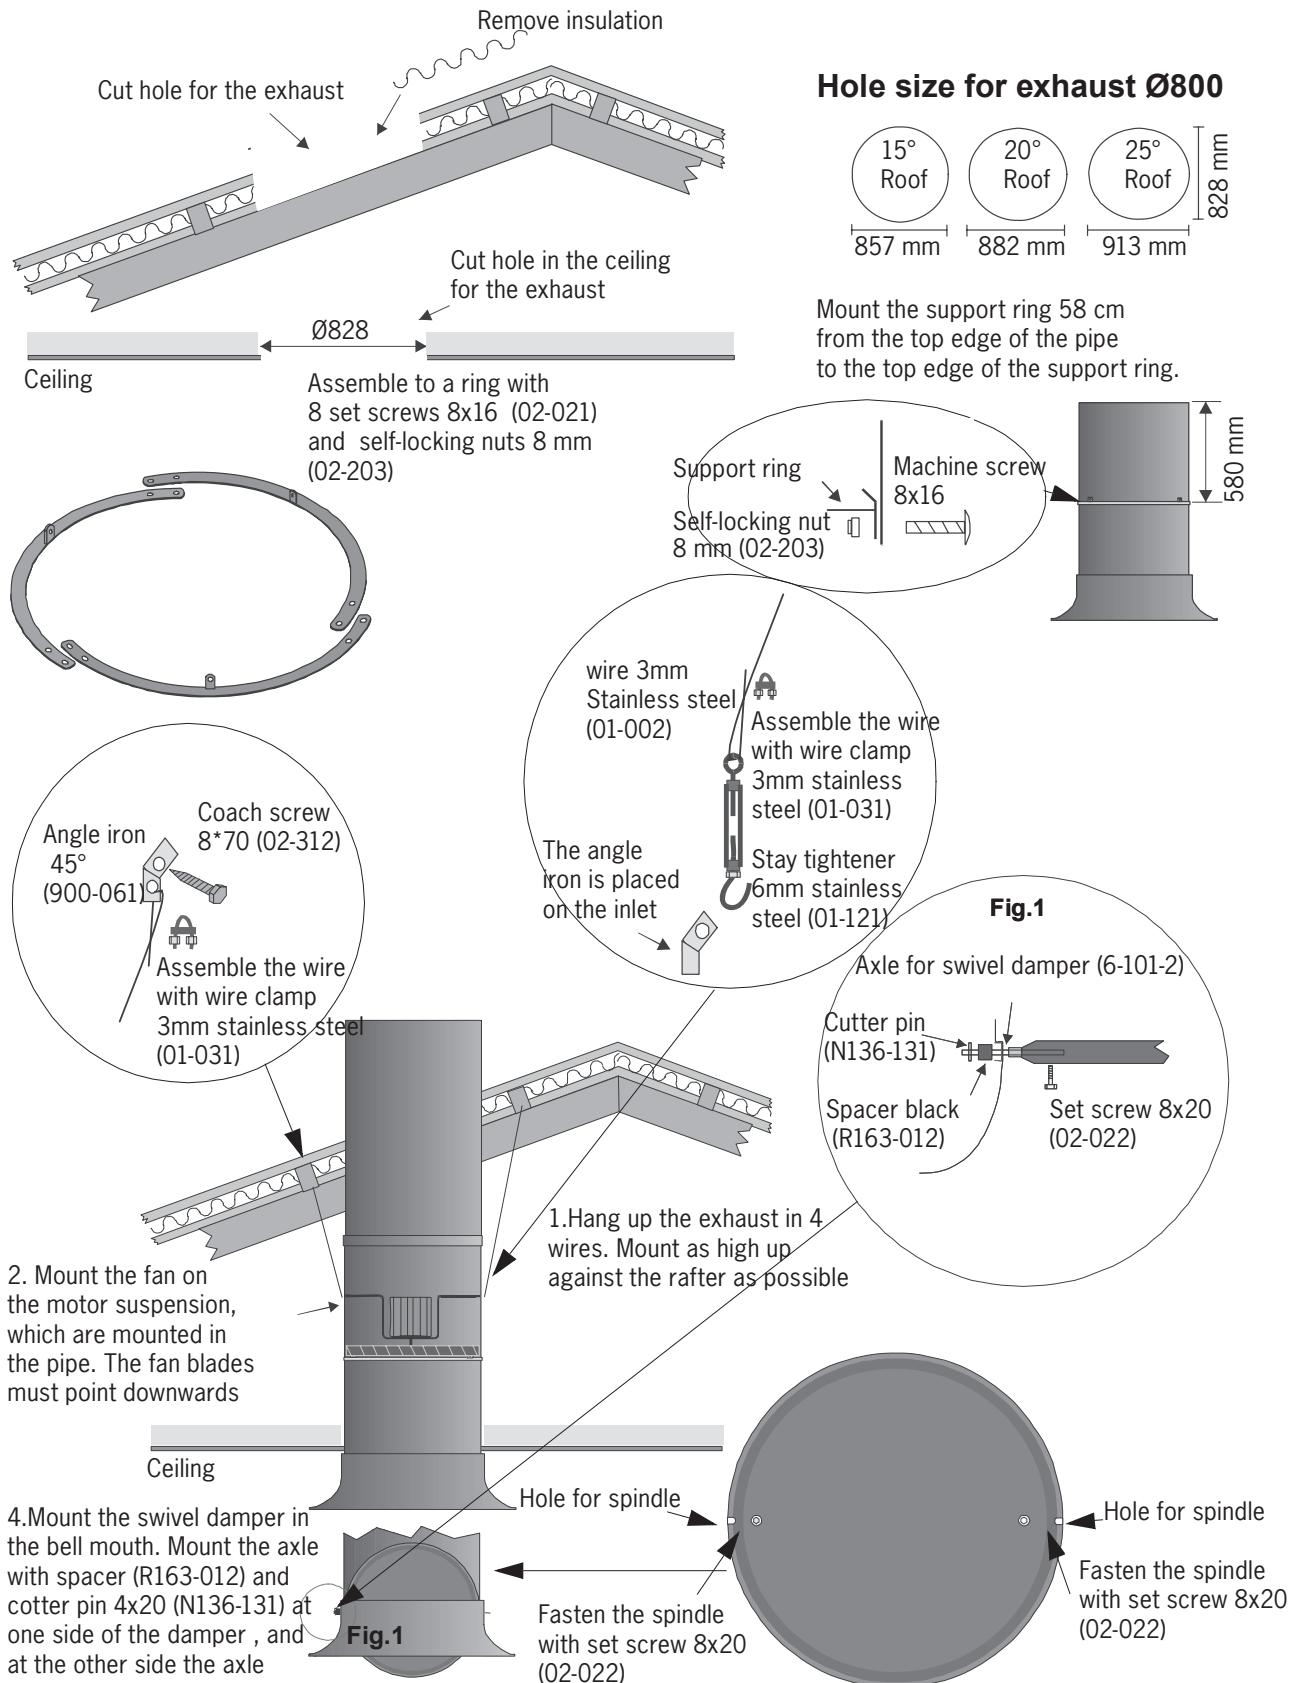

Mounting the exhaust in the ridge - through the loft

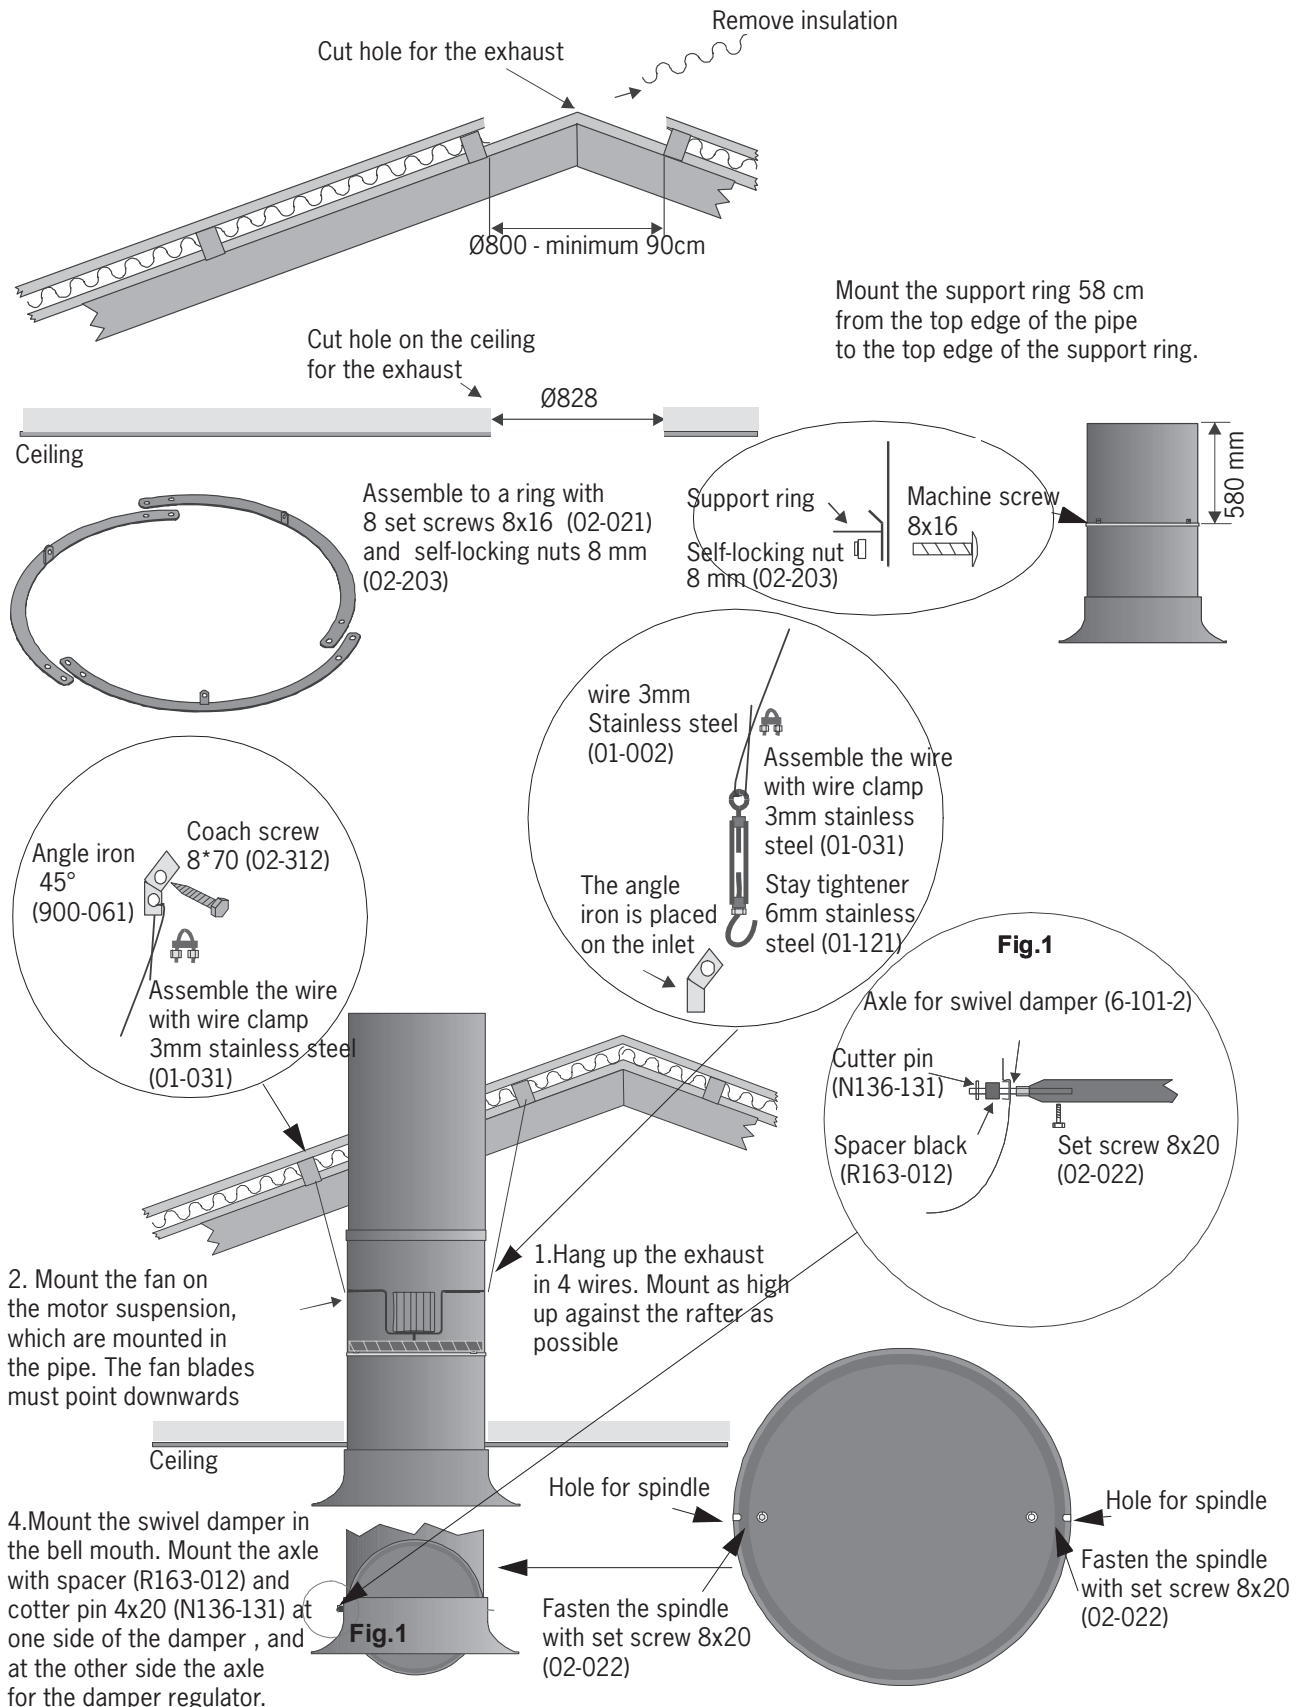


Mounting the flashing in the ridge

Multiflex Ridge can be used for slopes of 10°, 15° and 20°




Multiflex ridge flashing placed on the pipe

Push the rubber band over the pipe and flashing. Remove the white edging, and press the rubber band onto the pipe.

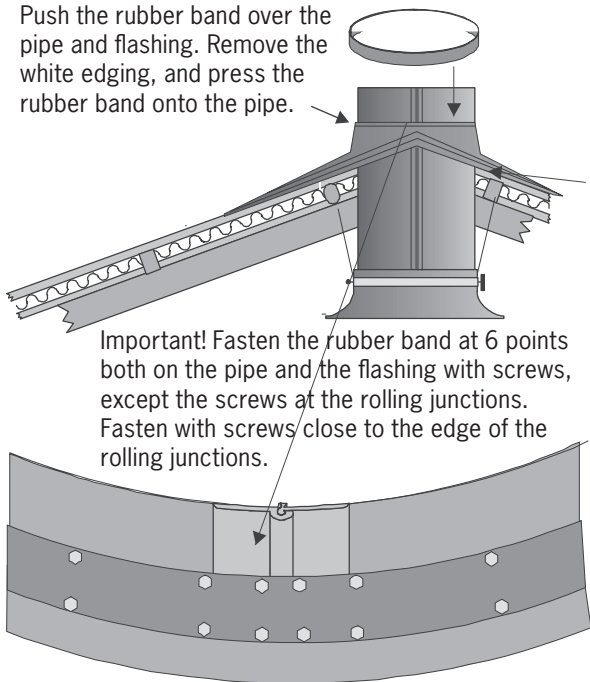


Fasten the flashing on the pipe with 4 screws 4,8x16 (N136-121)

Seal up with weatherstrip (birds are not included in the delivery from Funki) and fasten with screws (H72-016)

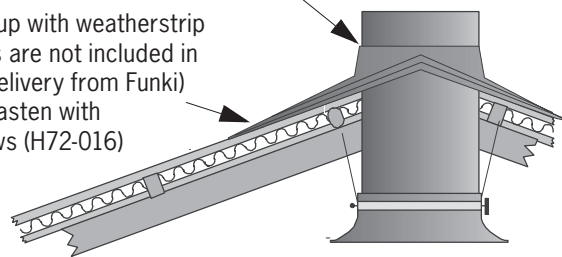


The same procedure

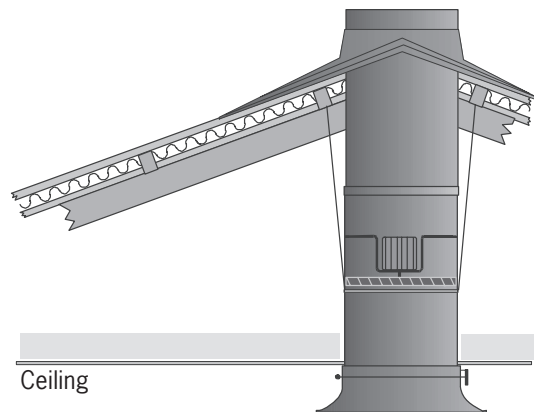

Push the cone 60 mm down over the pipe and fasten with drilling screw w/washer 4,8x19 (H71-002)

Mounted exhaust

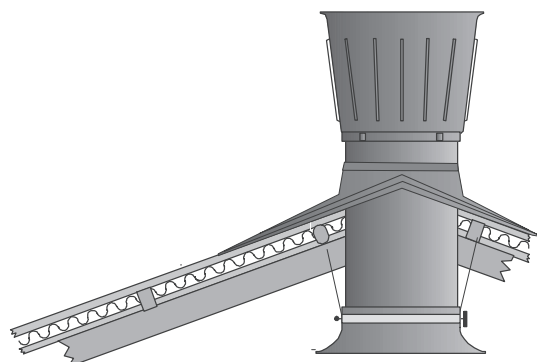

Mount the flashing on one side of the roof

Multiflex can be used for slopes of 10°, 15° and 20°


1. Push the flashing down the pipe

Cut of a roof with steel plate


2. Make tight with weatherstrip (birds are not included in the delivery from Funki) and fasten the flashing with screws all the way round.

3. Push the rubber band over the pipe and flashing. Remove the white edging, and press the rubber band onto the pipe.

8. Fasten the flashing along the sides with screws

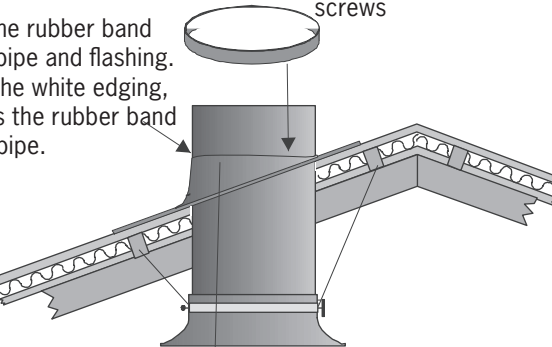

Important! Fasten the rubber band at 6 points both on the pipe and the flashing with screws, except the screws at the rolling junctions. Fasten with screws close to the edge of the rolling junctions

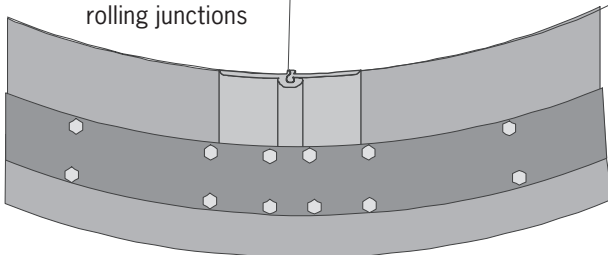

NB! If the roof is made of asbestos cement, put intermediate plate under the slit, and the procedure is the same as with steel plates

4. Cut a slit in the roof 50 mm wide and 100 mm from the multiflex upper edge

Important: End the slit in the steel plate on the first top in both sides by the multiflex edge

5. Mount the intermediate plate into the slit with a weatherstrip under the steel plate, and fasten with screws through every top


6. Joint in the corners after mounting

7. Den flade side lægges ovenpå Multiflex inddækningen. Der tættes med silicone og der skrues ned gennem indskudspladen, inddækning og tag




9. Push the cone 60 mm down over the pipe and fasten with drilling screw w/washer 4,8x19 (H71-002)


Mounted exhaust

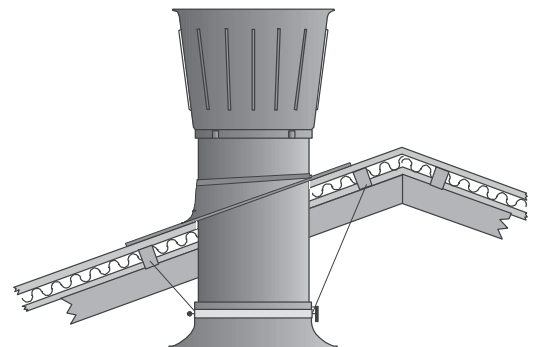


Mounting flexible flashing

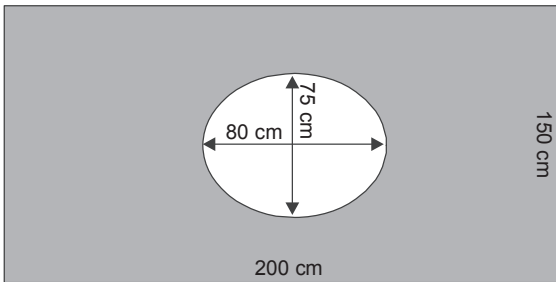

Cut a hole in the flashing according to the size in the drawing. The hole can be moved.

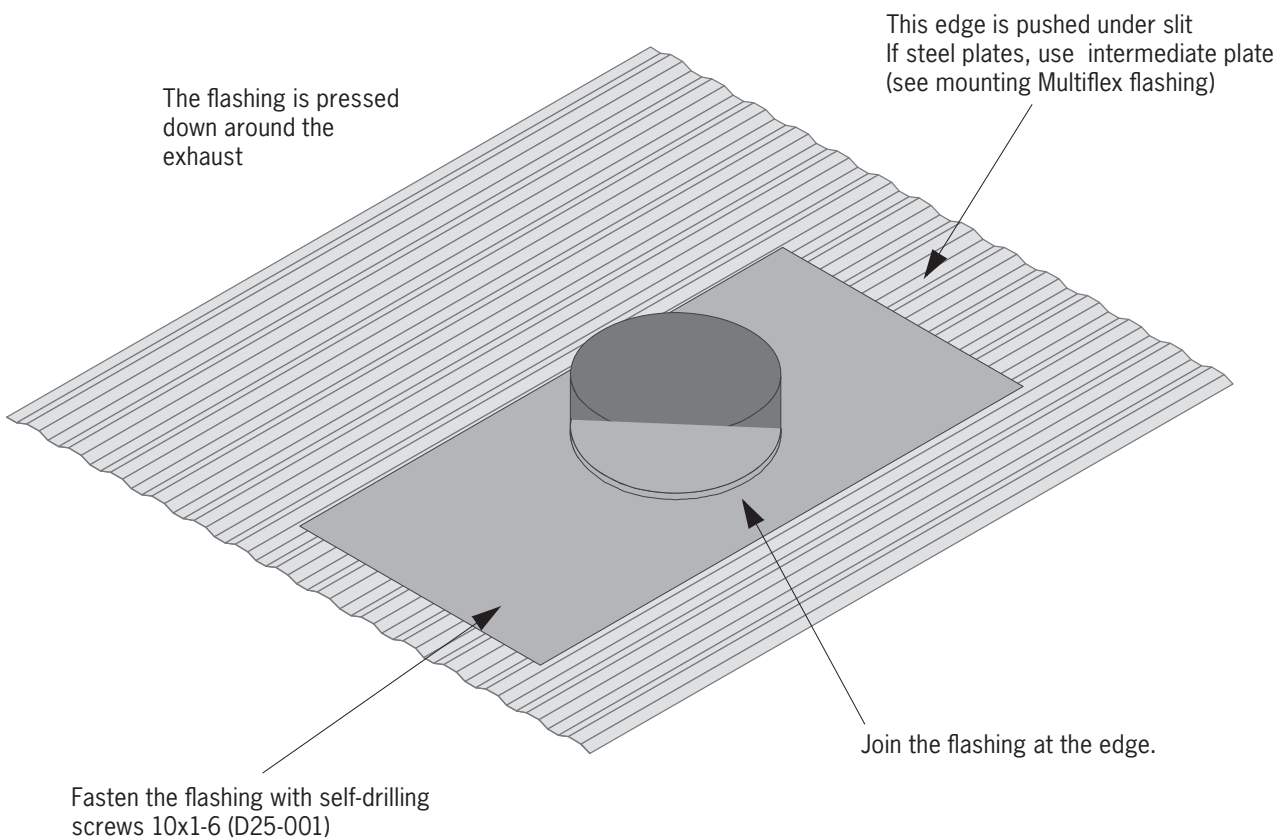

Mounting the light dimmer

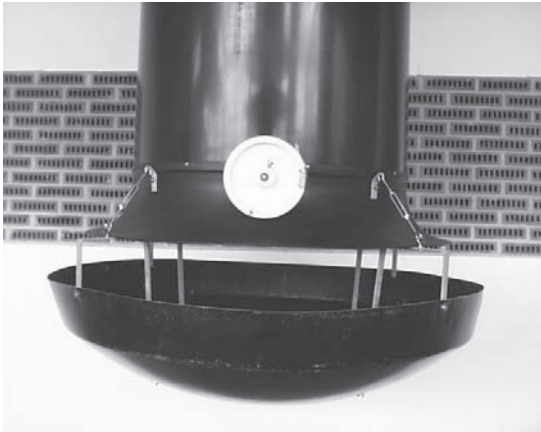


The light dimmer placed under the exhaust




Fittings and stay tightener mounted on the light dimmer


Mounting the drip tray PE1200

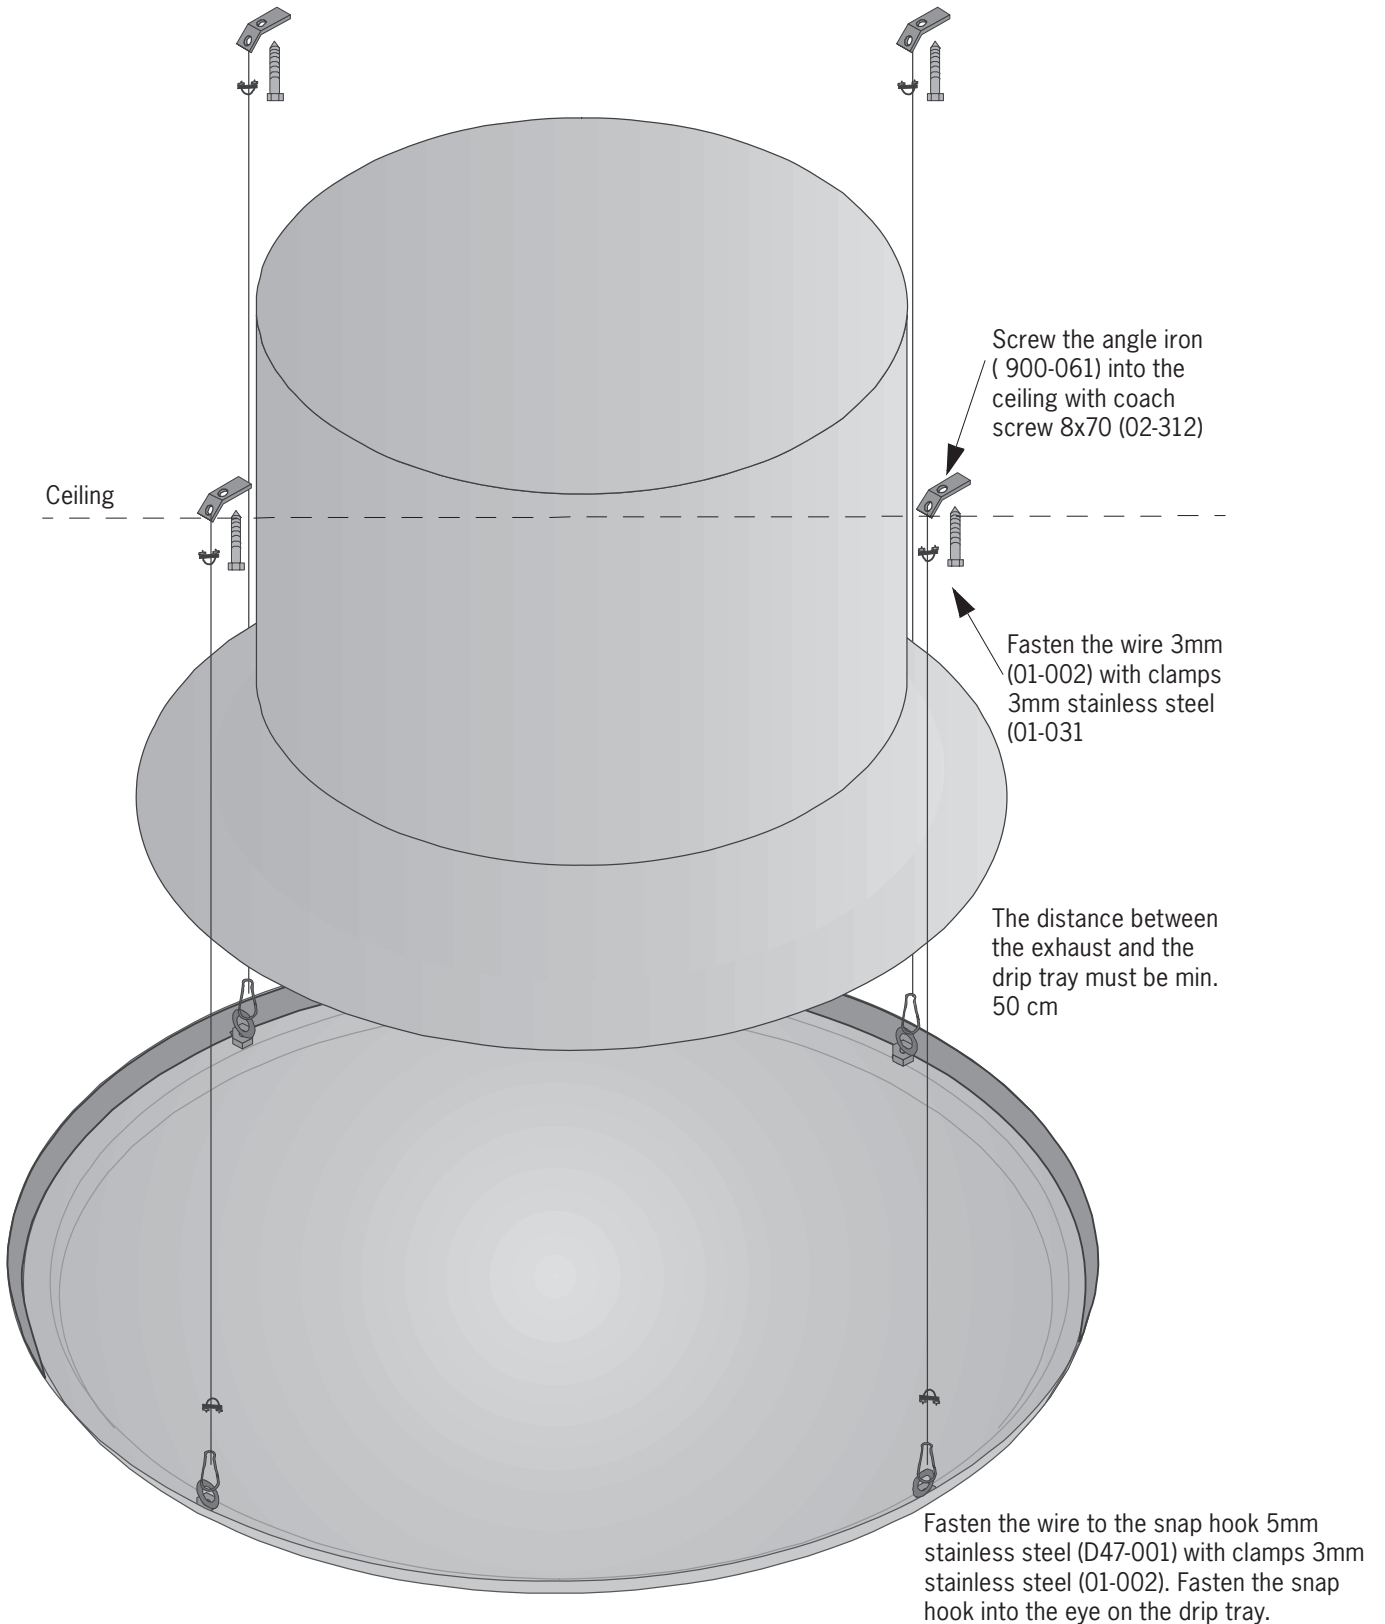

Mounting the light dimmer - exhaust through the loft Ø800

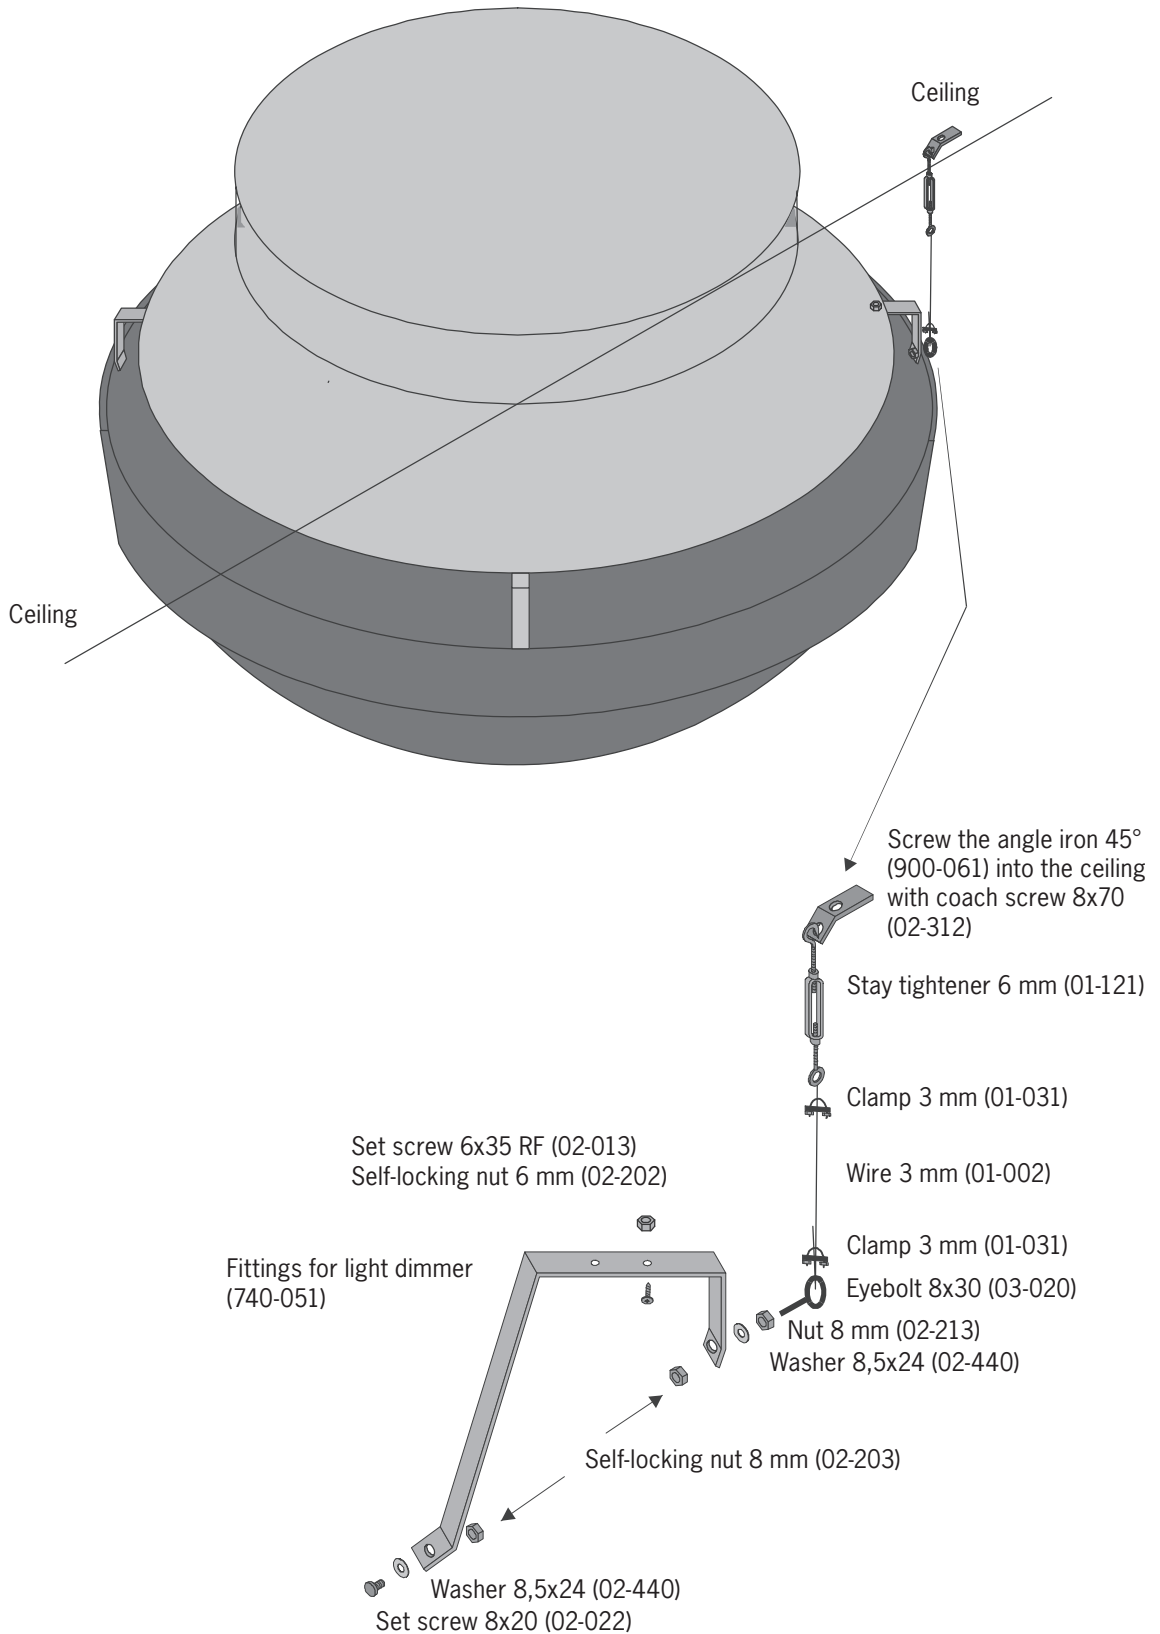

Mounting the Linak ON/OFF or the Linak LA12P on the swivel damper

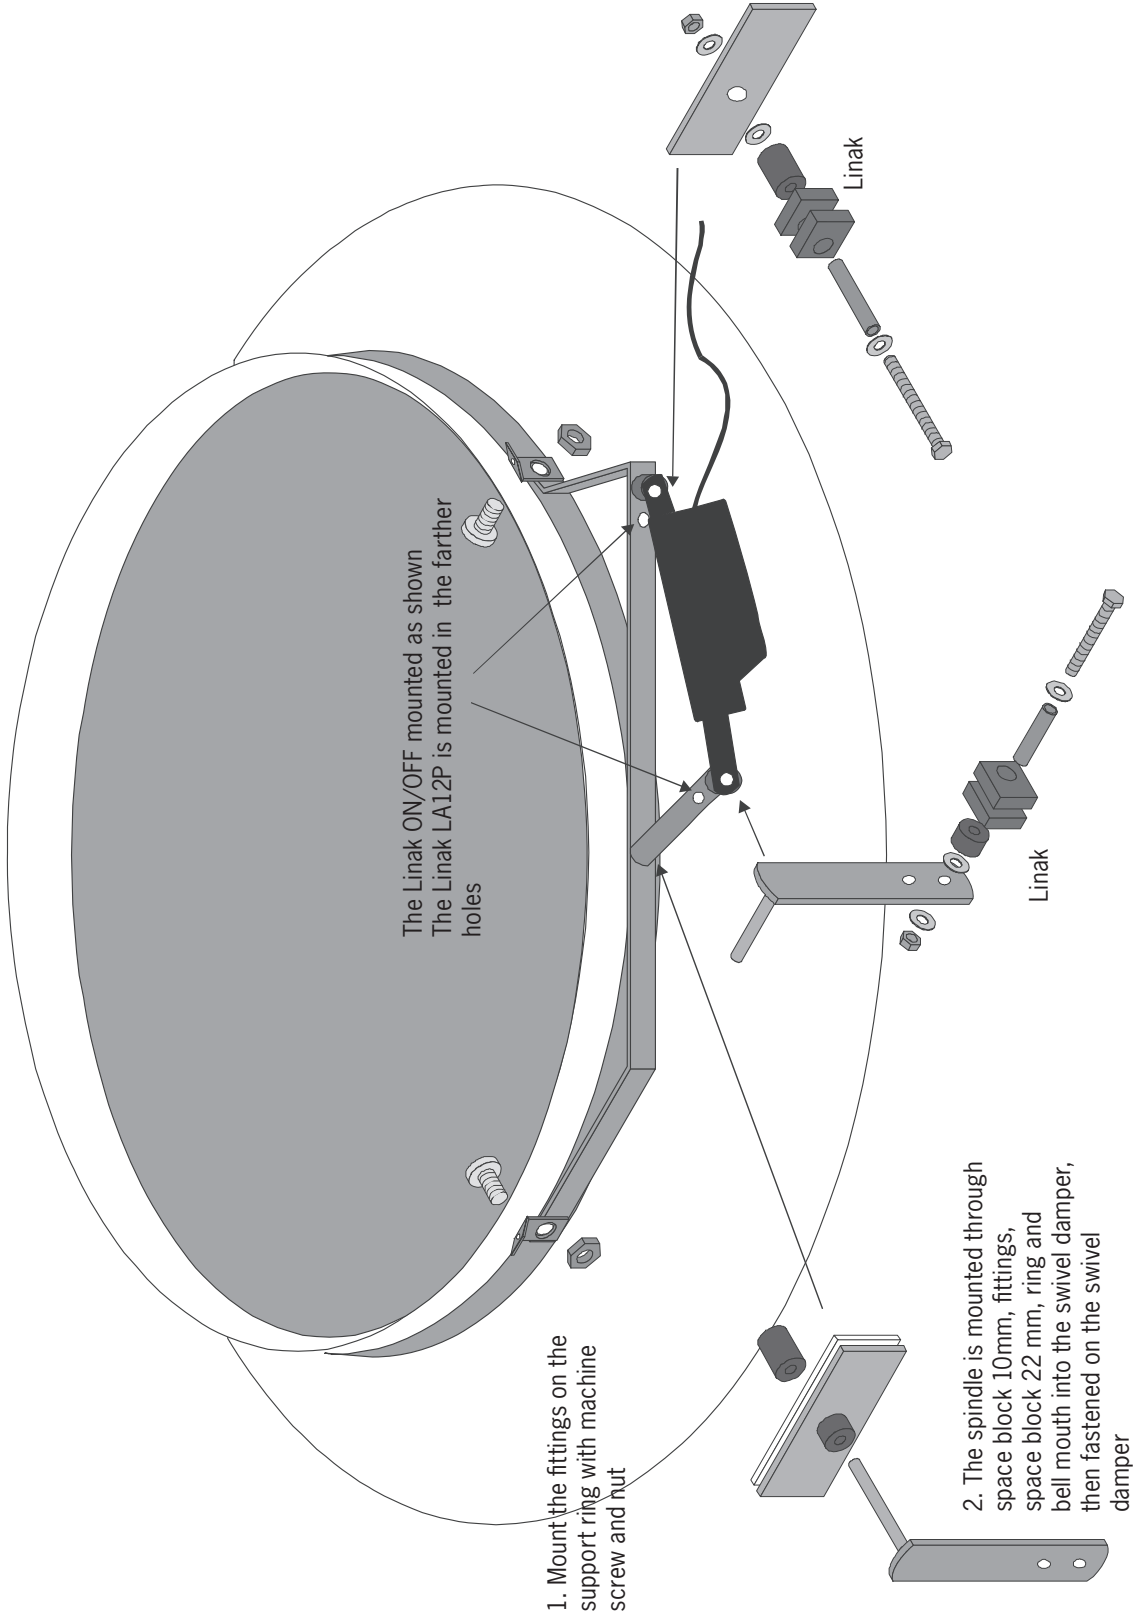

Mounting the wire pulling system on exhausts with regulator arm


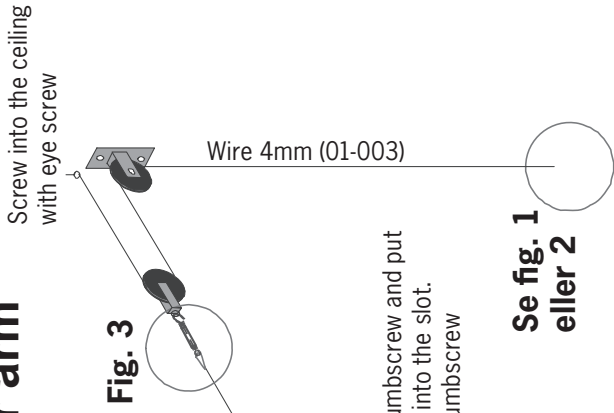


Fig. 3

Screw into the ceiling with eye screw

Fig. 3
The wire and piano wire are assembled with 1 thimble, 1 stay tightener and 2 clamps

Clamp 3 mm (01-031)

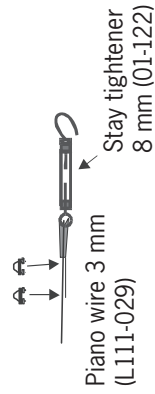

Loosen the thumbscrew and put the piano wire into the slot.
Tighten the thumbscrew

Se fig. 1 eller 2

Fasten the regulator arm onto the damper spindle. When the damper is closed the regulator arm is in a position of 45° angle in proportion to the damper spindle

Fig. 4

Put the wire through a snap hook and fasten with 2 clamps. Hang the weight in the snap hook.



Fig. 5

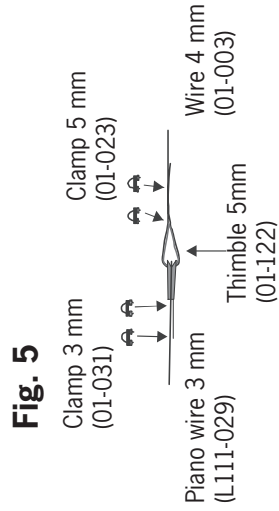


Fig. 1 Oilhydromat

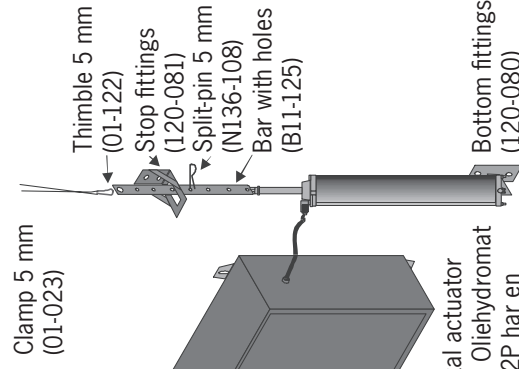


Fig. 2 Linak LA32

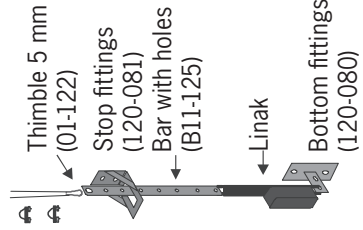


Fig. 5

Fig. 4

Ved justering skal actuator være trukket til. Oilhydromat samt Linak LA32P har en vandring på 32 cm

