



TUBE-O-MAT NX Feeder

Fresh water and dry feed in one feeder



- Up to 50 pigs per feeder; from 6 to 120 kg
- 120 L feed volume
- Perfect for both meal- and pellet feed
- Extremely long durability
- Minimum waste of feed

| TUBE-O-MAT® NX FEEDER |

Fresh water and dry feed in one feeder

The feeding principle considers the natural manipulation behaviour, as the pigs have to activate the feeder to get feed. Consequently, the trough is cleaned and free of feed residues, which helps to keep a high level of hygiene.

The TUBE-O-MAT NX hopper is shaped with almost vertical sides to prevent bridging. The trough has double drinking bowls allowing the pigs to choose water or dry feed. Taking water and feed at the same time is also reducing stress in the group. You can measure the effect: excellent daily gain from wean to finish.

Volume

Hopper: 120 l

Capacity per trough

Wean-To-Finish 7-120 kg: 30-50 pigs

Frame

TUBE-O-MAT NX is delivered with frame of 4 mm stainless steel


Water supply

3/8" stainless steel pipe with external thread.


Adjustable press nipple, stainless steel (item no. 93245)



TUBE-O-MAT® NX V+

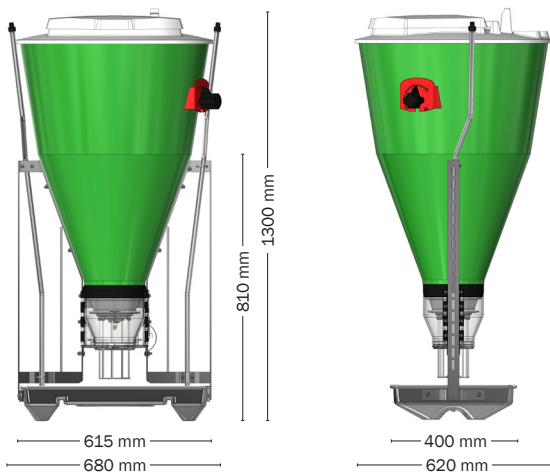


ITEM NO.: 560155 M/U (assembled/unassembled)
FOR: Wean-To-Finish

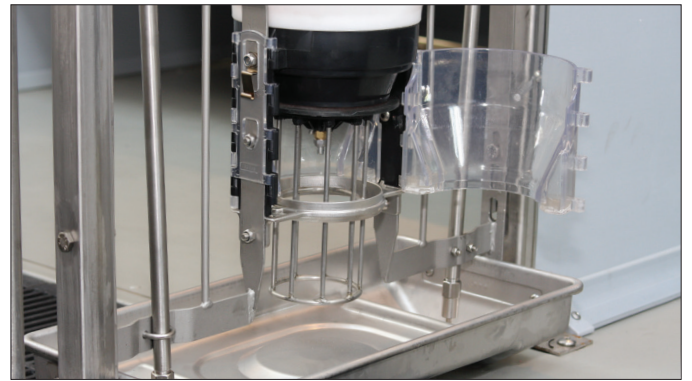

TUBE-O-MAT® NX VI+ trough and dosage part

The activating part on VI+ models is made of stainless steel and is designed for both piglets and finishers. Simple and very strong. Besides, there is a transparent lid, that can be opened for cleaning purposes.

TUBE-O-MAT® NX CLASSIC

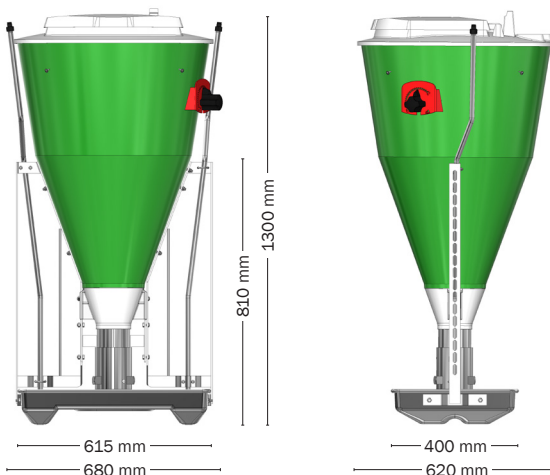

ITEM NO.: 560165 M/U (assembled/unassembled)
FOR: Wean-To-Finish



TUBE-O-MAT® NX CLASSIC trough and dosage part

TUBE-O-MAT® NX CLASSIC is especially developed for finishers. It is supplied with an extra strengthened feed outlet, thus it can withstand the large pigs' constant activation. The trough of the CLASSIC model is designed to help keep the feed and the water from being mixed together.

Subject to changes in materials and design is reserved.

B-1028-GB



ACO FUNKI A/S
Kirkevænget 5
DK-7400 Herning
T. +45 9711 9600
www.acofunki.dk

