



GB


## Assembly instruction Inlet from loft Ø600

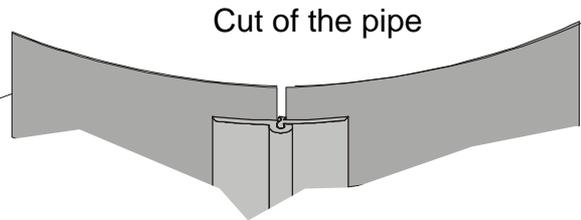





# Assembly instruction - Air inlet from loft

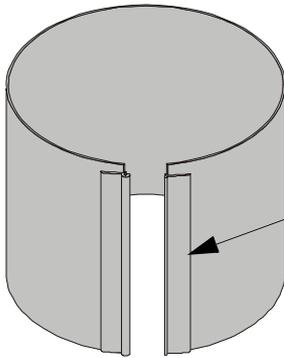

Click the two rolling junctions together


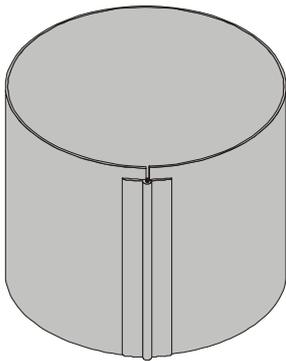


Samlet rør

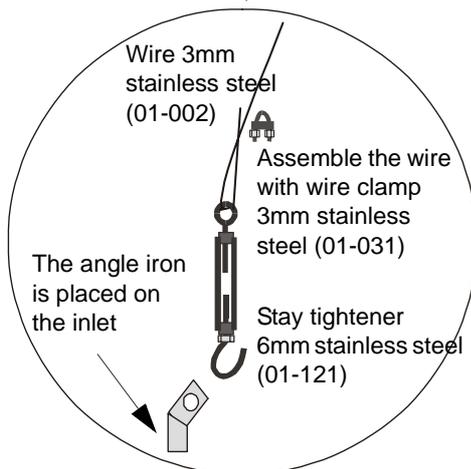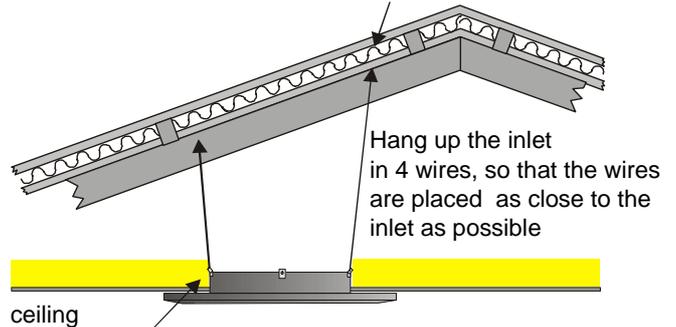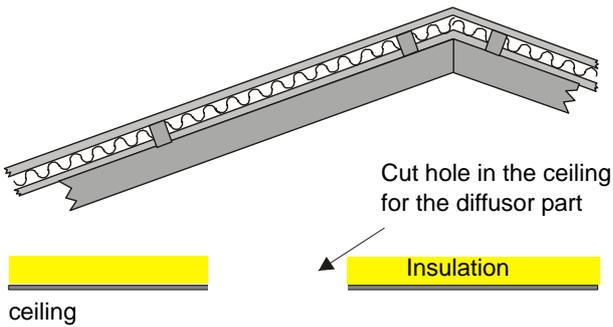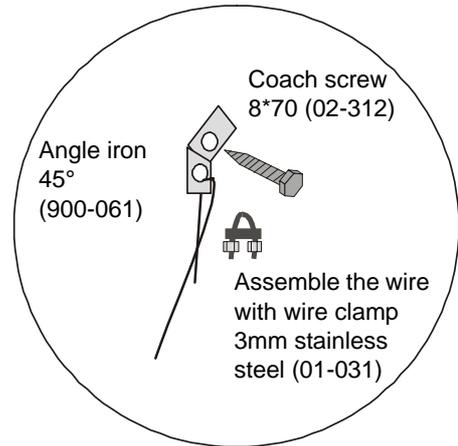



## Assembly instruction - Inlet from loft

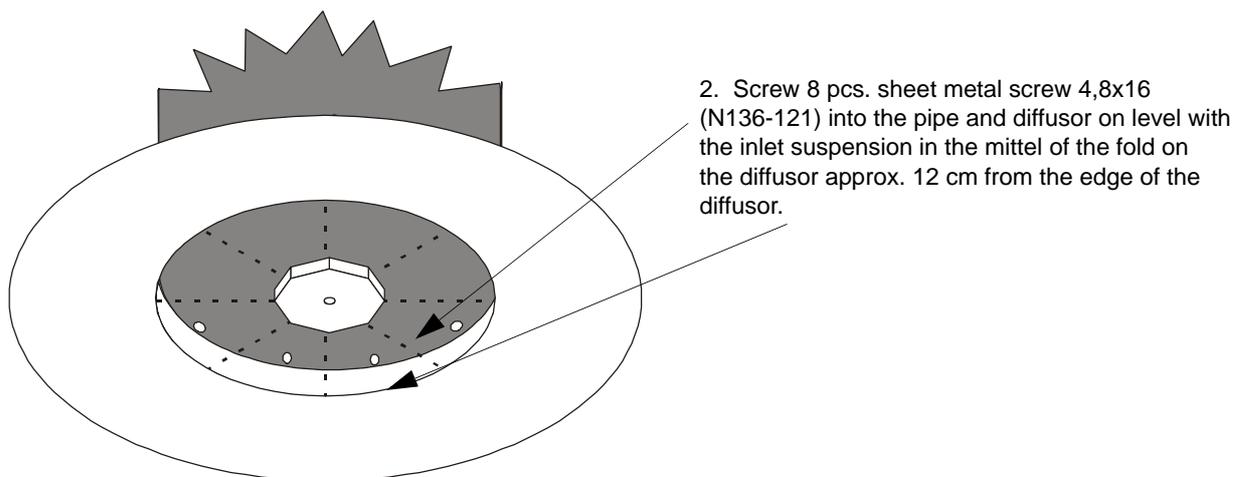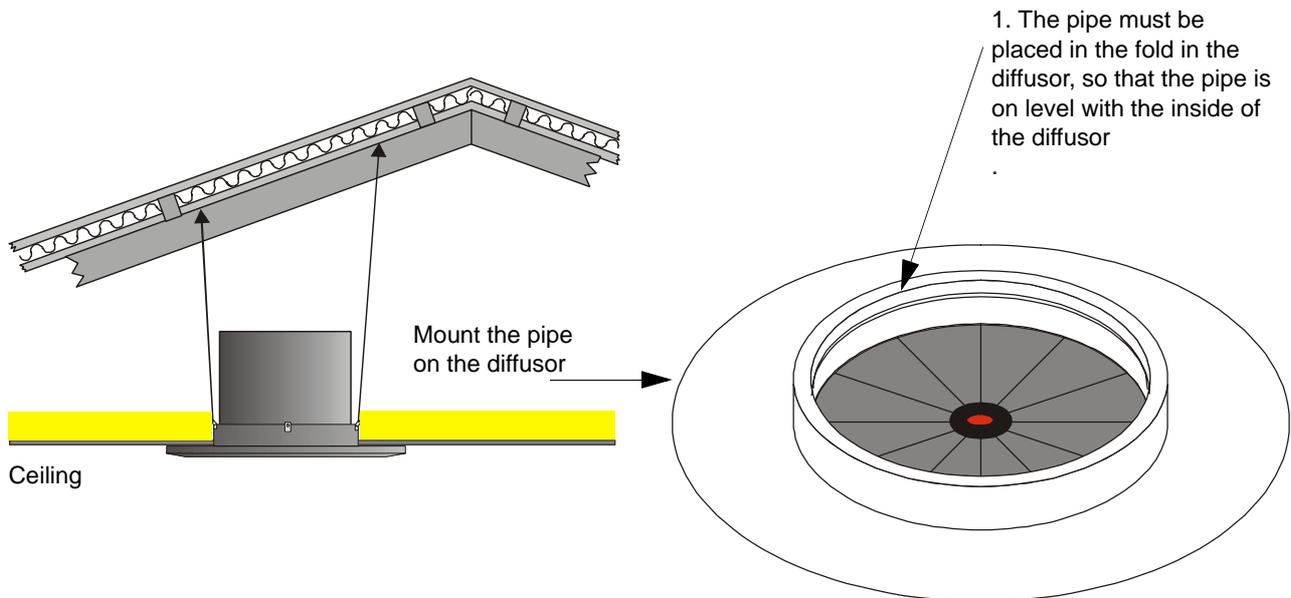

System with fan: see next page!

# Assembly instruction - Inlet with fan


Mount 3 pcs. motor fittings inside the pipe in rough-bored holes

Motor suspension





Cut of the pipe

Fasten the fan on the shaft


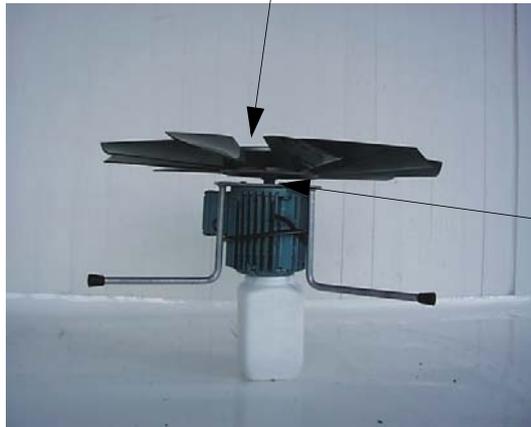


Mount the flange on the motor with 4 set screw 6x16

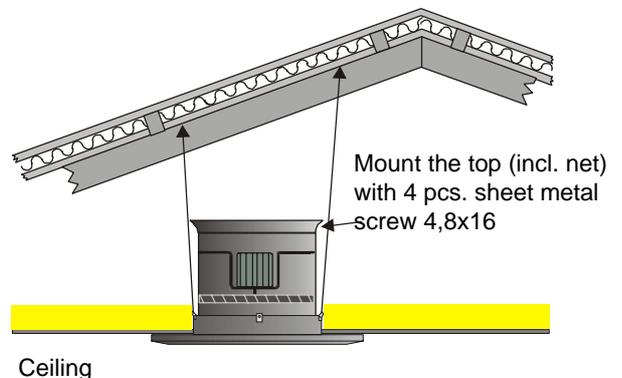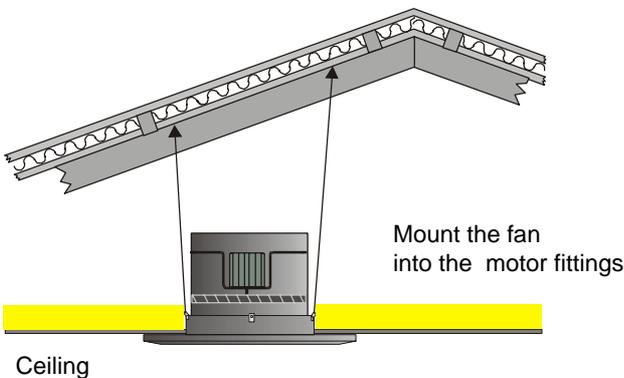

**NB !!** The fan blades must be placed under the motor

# Mount the air distributor under the inlet

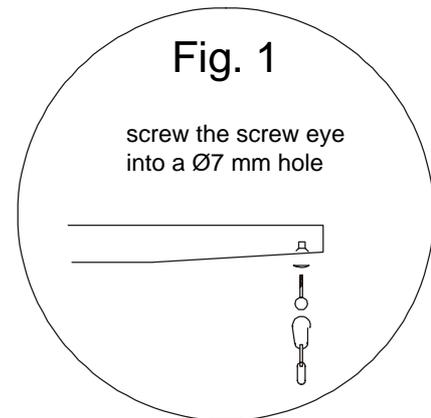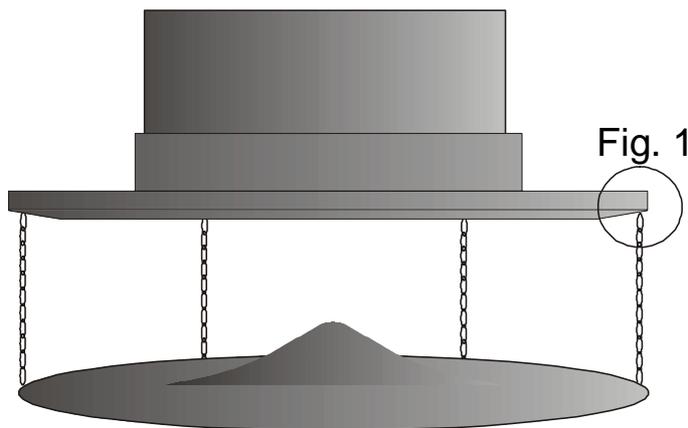

T:\Montageblade\Vent\M-5100\_GB\_Luftindtag\_genmem\_loft\_0600\M-5100\_GB\_LUFTINDTAG\_GENNEM\_LOFT\_0600.fm



# Mounting the wire pulling system on diffusers placed in 2 rows

**Important!!** When the diffuser is suspended, the regulator arm must be on the left, when you face the damper controller (fig. 1 or 2)

**NB!**

The diffuser must be closed when mounting the wire. The regulator arm will then be in a position of approx. 15° to the wire. Fasten the wire on the regulator arm 55 cm from the center of the diffuser.

**Fig. 4**  
Put the wire through a snap hook and fasten with 2 clamps. Hang the weight in the snap hook

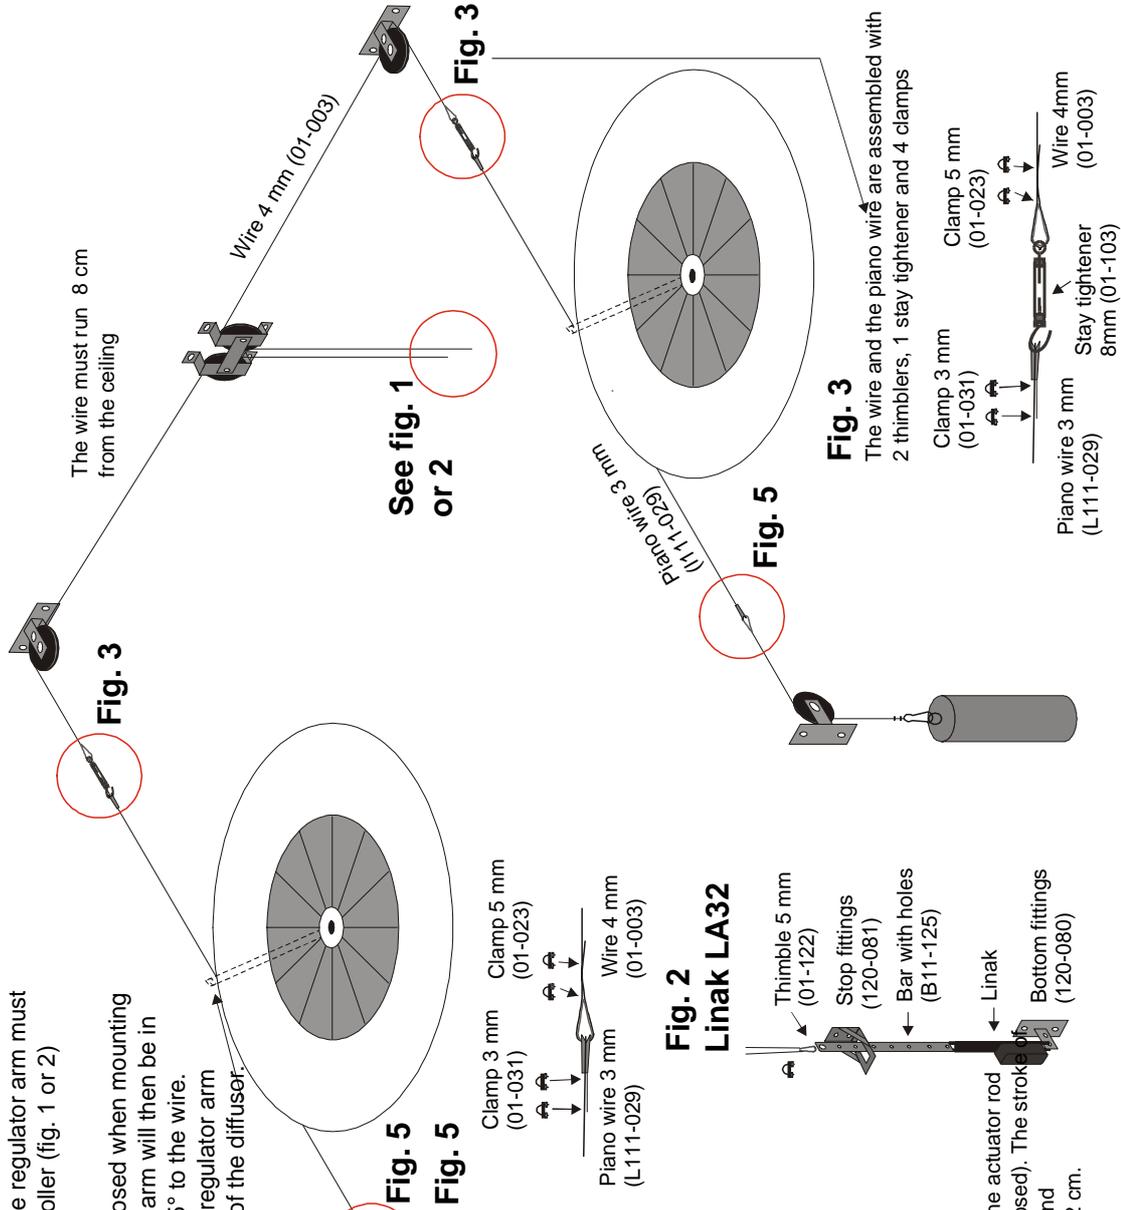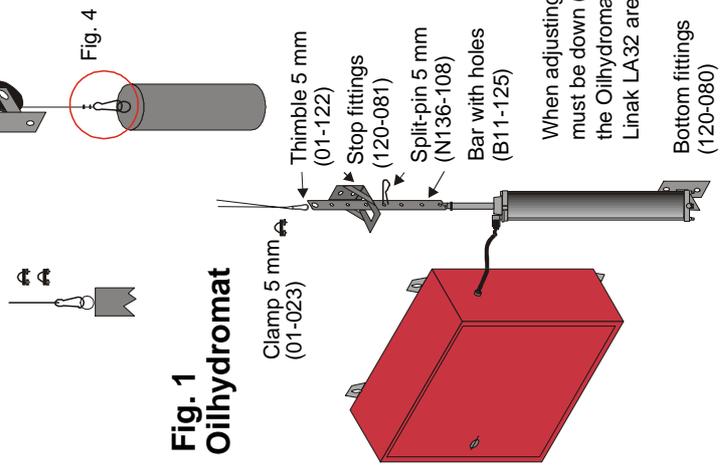


T:\Montagebl\ade\Vent\M-5100\_GB\_Luftindtag\_gennem\_loft\_Ø600\M-5100\_GB\_LUFTINDTAG\_GENNEM\_LOFT\_Ø600.fm


# Mounting the wire pulling system on diffusers placed in 1 row

**Important!!** When the diffuser is suspended, the regulator arm must be on the left, when you face the damper controller (fig. 1 or 2)

**NB!**  
The diffuser must be closed when mounting the wire. The regulator arm will then be in a position of approx. 15° to the wire. Fasten the wire on the regulator arm 55 cm from the center of the diffuser.

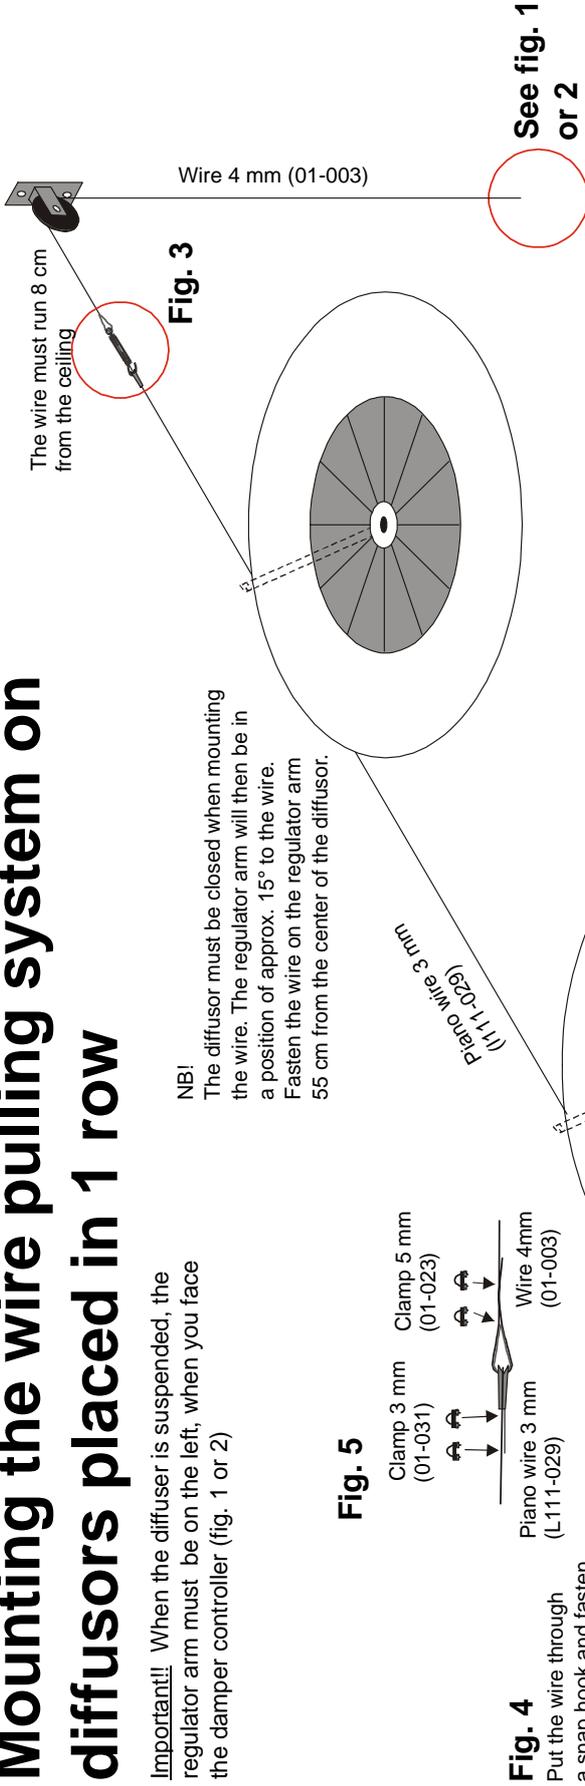


**Fig. 5**



**Fig. 4**


Put the wire through a snap hook and fasten with 2 clamps. Hang the weight in the snap hook

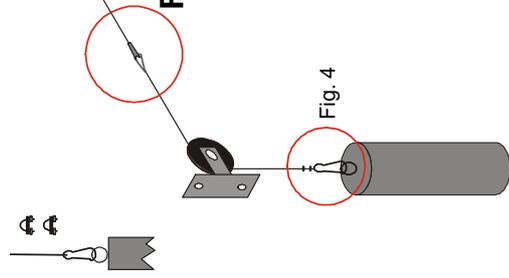


**Fig. 5**

**Fig. 3**

The wire and the piano wire are assembled with 2 thimbles, 1 stay tightener and 4 clamps

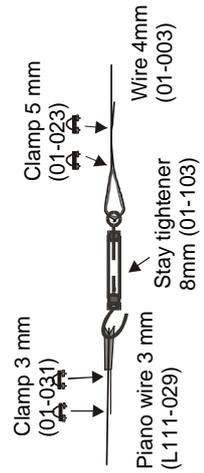


**Fig. 1 Oilhydromat**

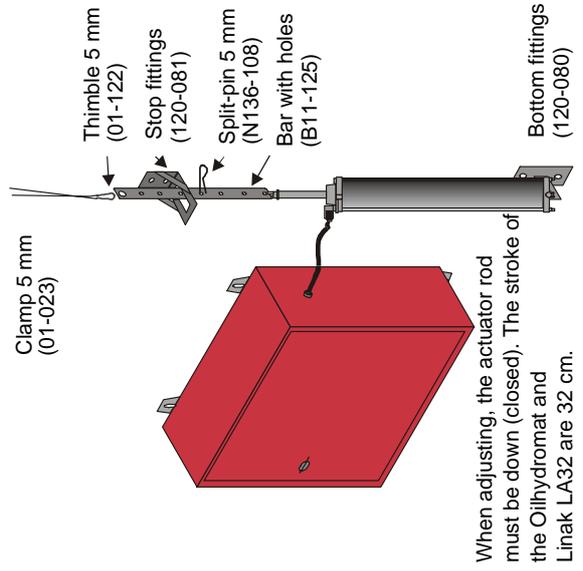

When adjusting, the actuator rod must be down (closed). The stroke of the Oilhydromat and Linak LA32 are 32 cm.

**Fig. 2 Linak LA32**

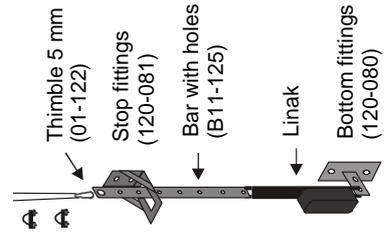

## Mount the Neptronic on the diffusor

