


MOUNTING INSTRUCTIONS



INN-O-FLEX Fiber

NOTE! Rules and dimensions are illustrated with examples and item numbers for panel height 735 mm. The same rules and dimensions apply to 642 mm.

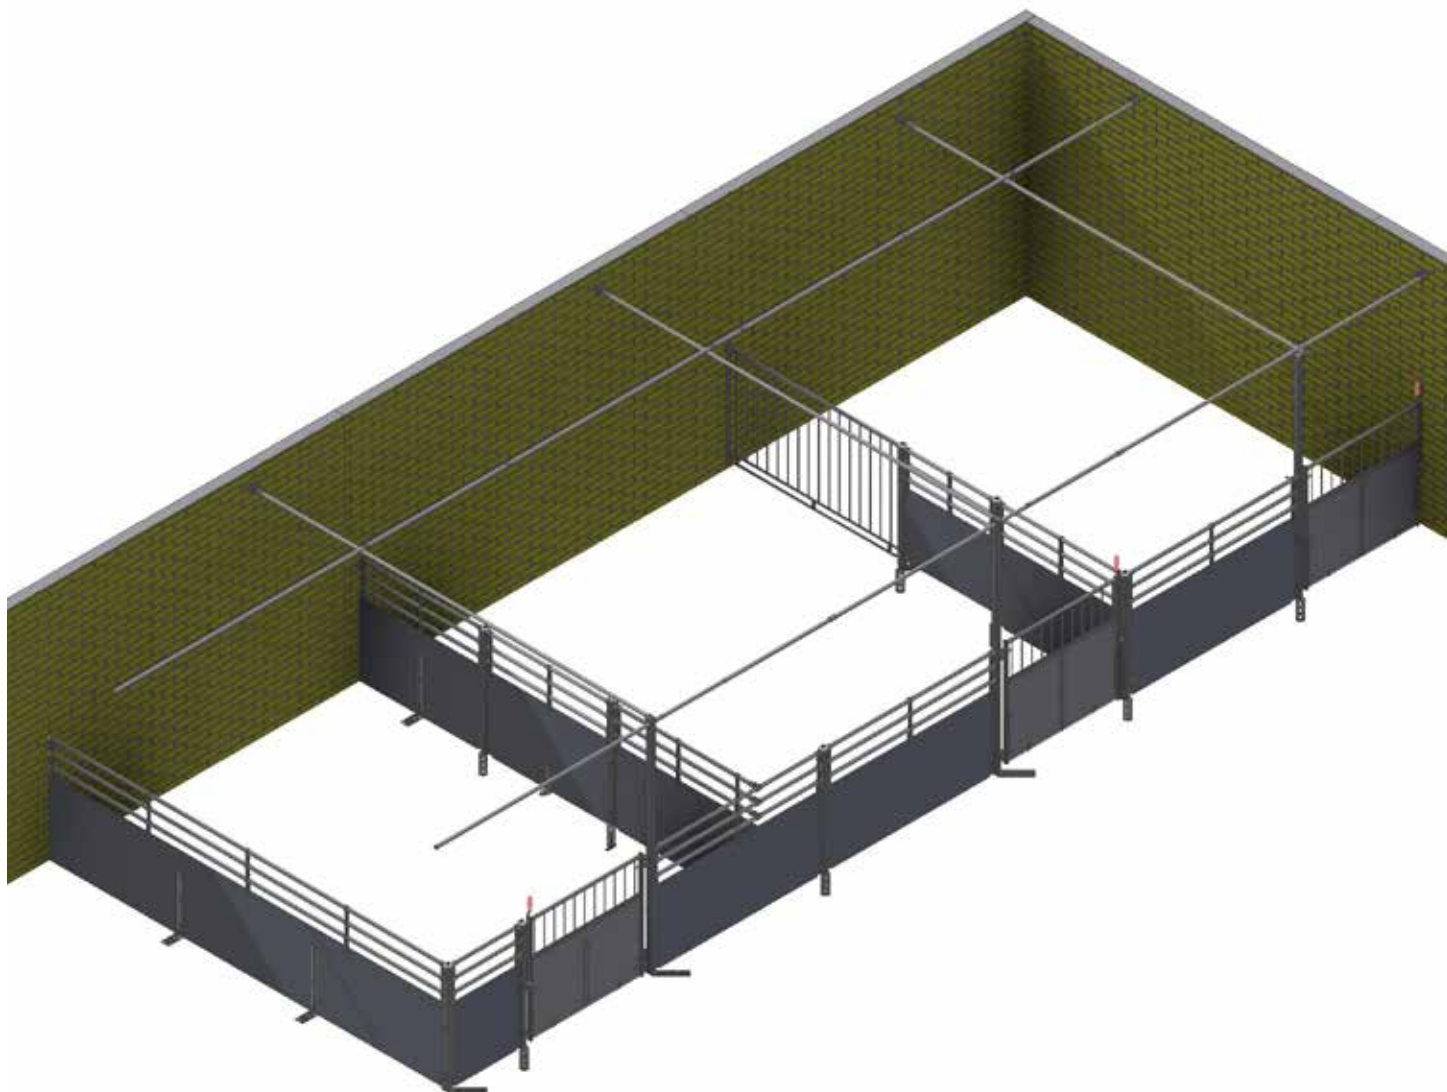

ACO FUNKI A/S

Kirkevænget 5


DK-7400 Herning

Tel. +45 9711 9600

www.acofunki.com


DANISH DESIGN | GERMAN QUALITY | GLOBAL EXPERIENCE

Overview of the path

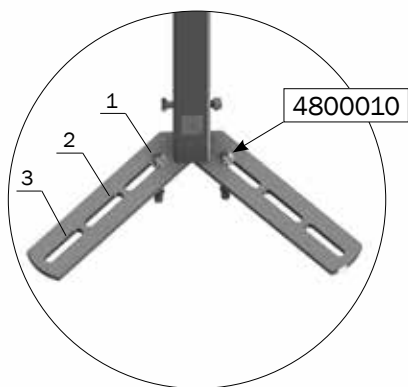


Can use 3 positions to secure the post to the floor.

The closer the screws are placed to the post, the more stable the post will be.

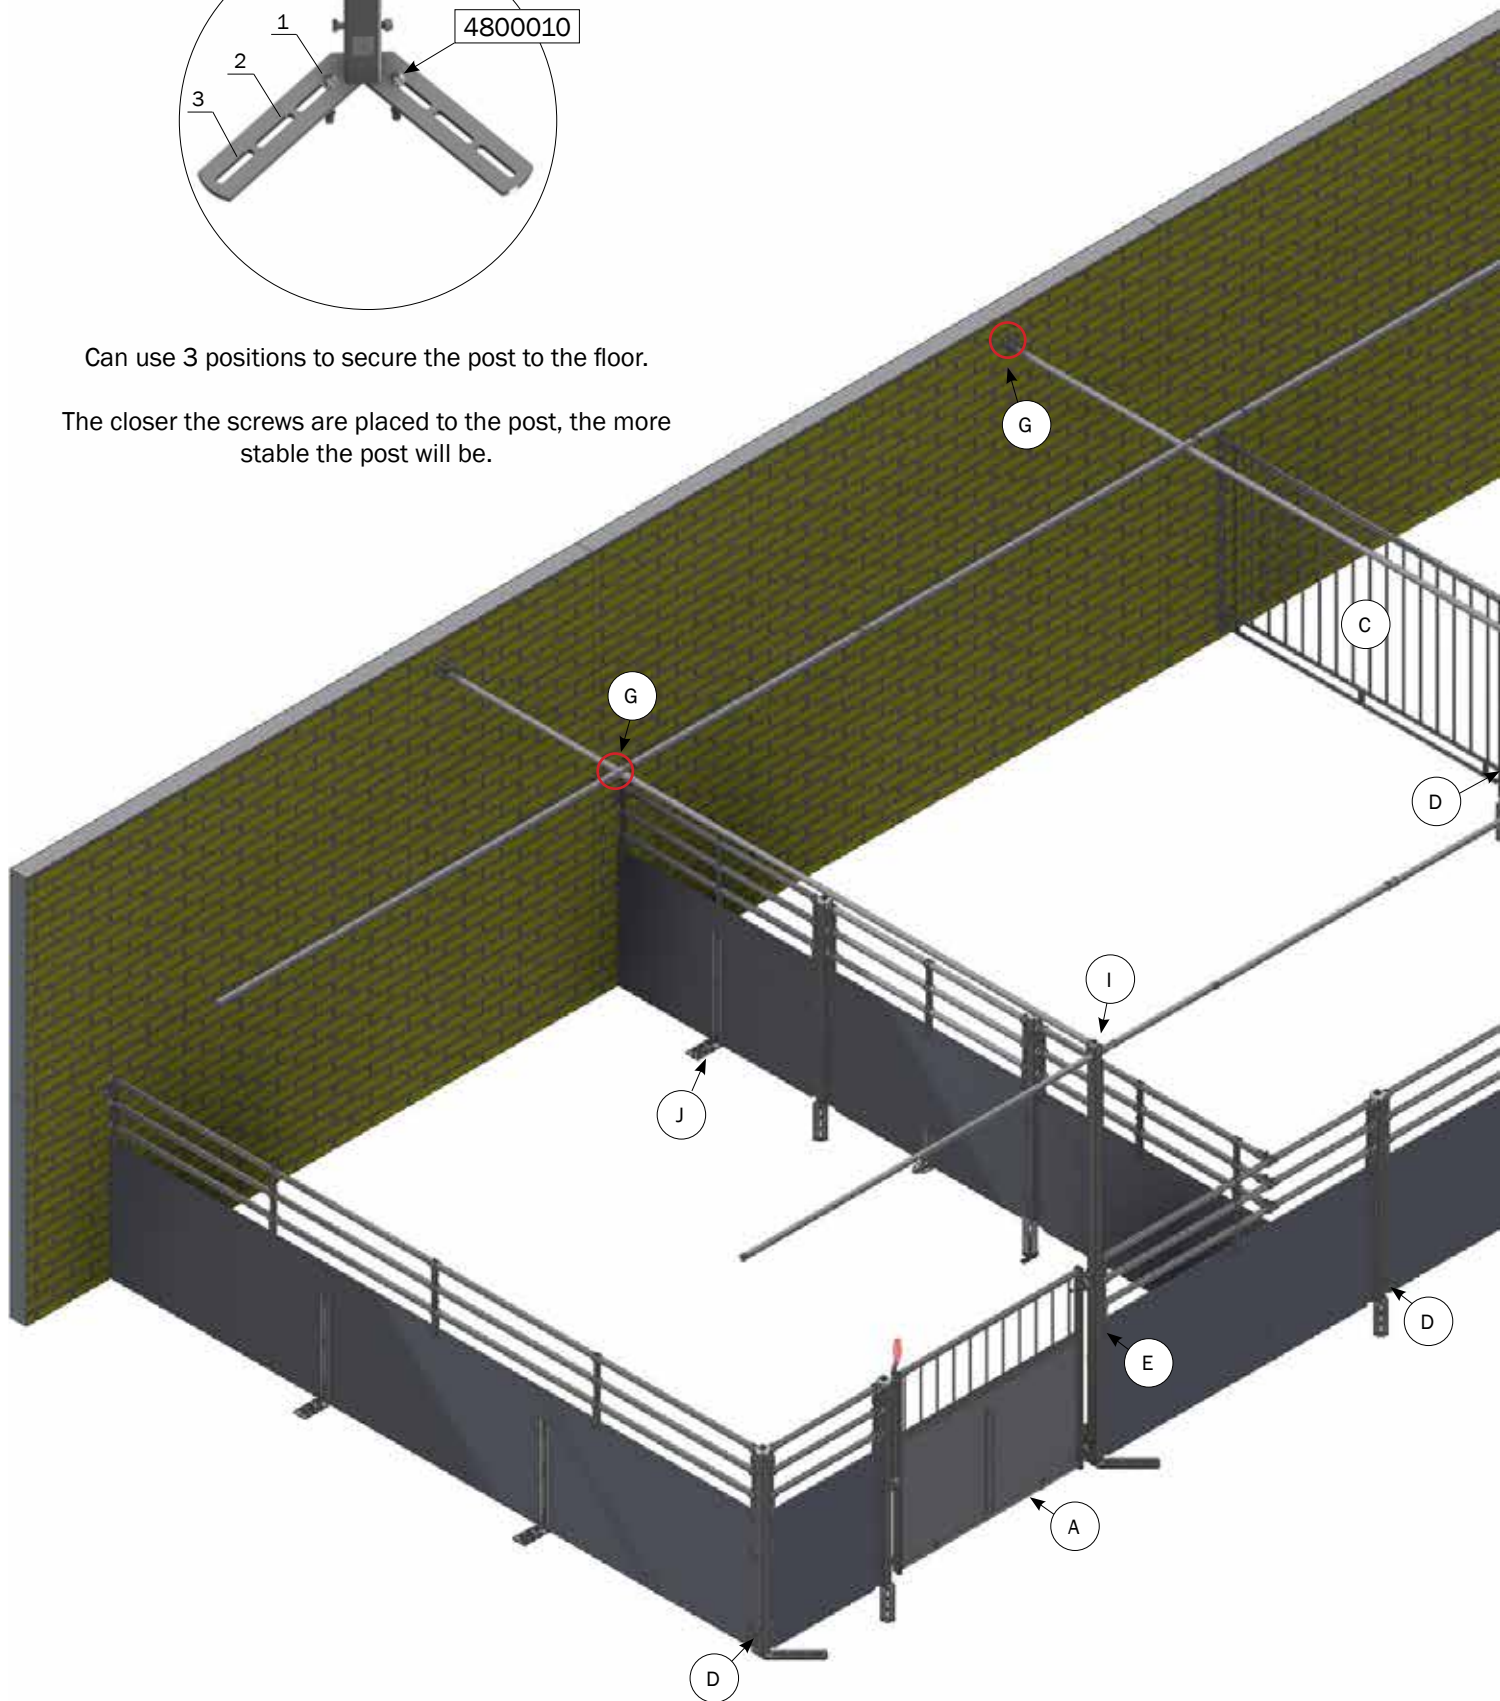


Overview of the path

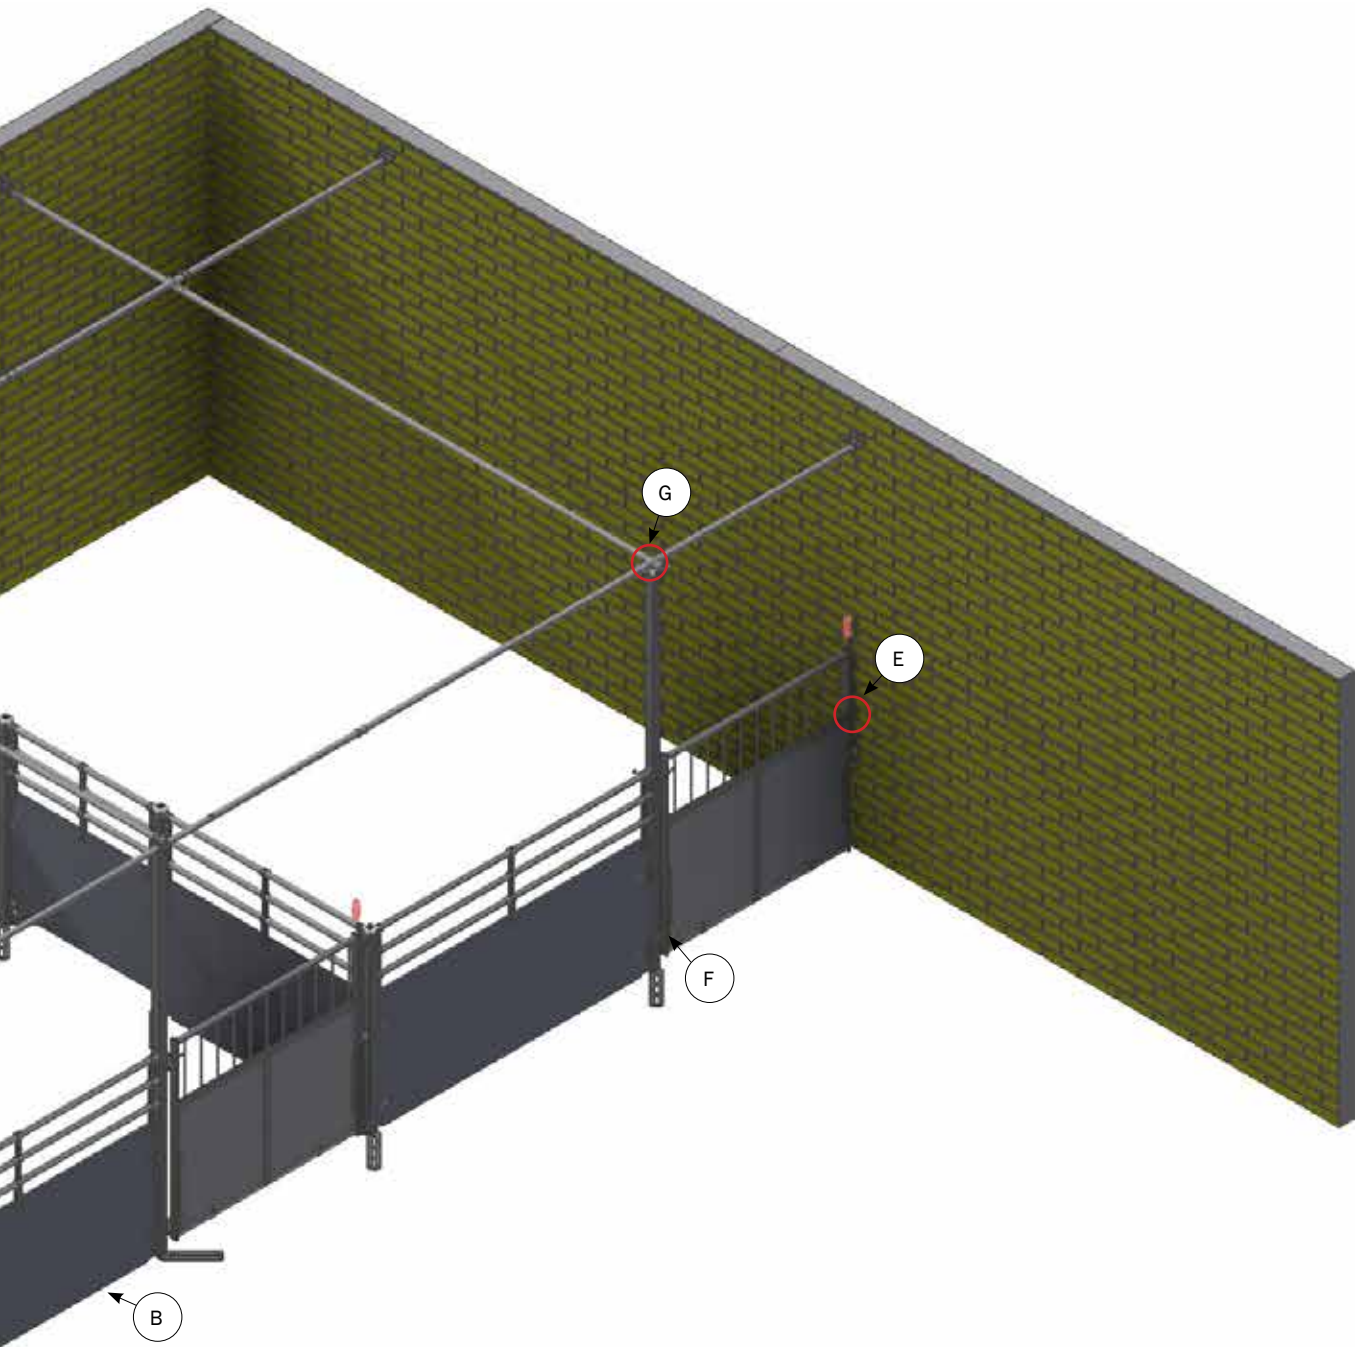


No.	Side	Description
A	4	PARTS LIST FOR GATES
B	5-7	PARTS LIST FOR SIDES
C	8	GRILLE OVERVIEW
D	9-11	ASSEMBLY OF SIDES
E	12-13	ASSEMBLY OF GATES
F	14-16	ASSEMBLY OF LOW/HIGH POSTS
G	17-18	ASSEMBLY OF STABILIZATION TUBES
I	19-20	STABILIZATION OF POSTS
J	21	STABILIZATION OF SIDE

Gate for INN-O-FLEX fiber

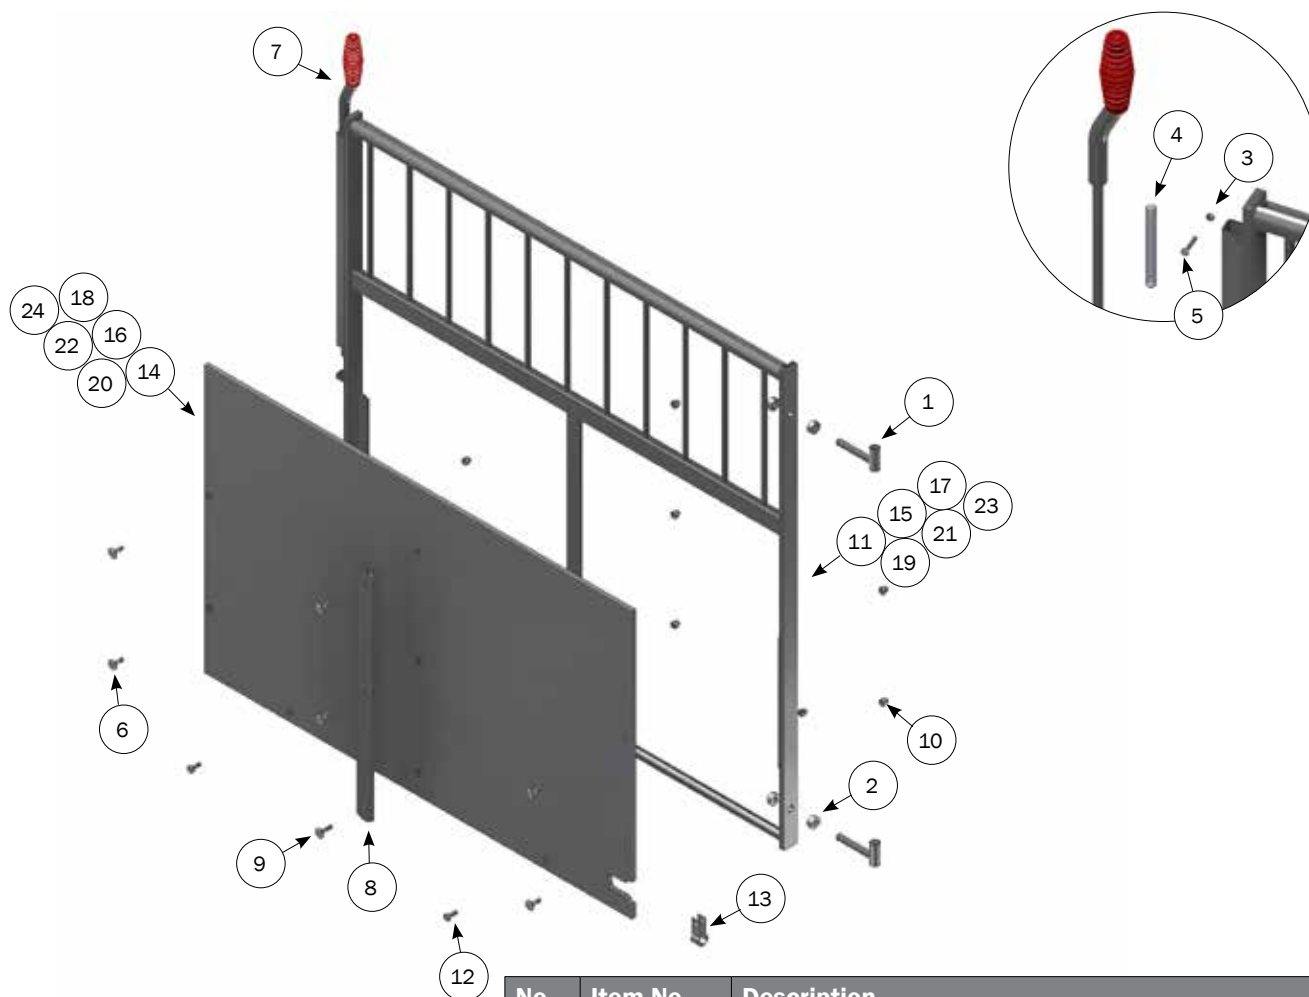


No.	Item No.	Description
	4010569	GATE H110 PLATE/GRILLE 800-1790 MM WITH PIN LOCK INN-O-FLEX FIBER
1	4550427	STUD BOLT STAINLESS STEEL
2	68598	NUT M14 A2 DIN 934
3	33905000	LOCK NUT M5 A2 DIN 985
4	9929004	COMPRESSION SPRING 1.6X12X115 MM
5	30305025	SET SCREW M5X25 A2 DIN 933
6	36308025	MUSHROOMHEADED BOLT M8X25 A2 DIN 603
7	4105183	PIN LOCK FOR GATE INCL. GRIP
8	4920410	BACKSTOP H560
9	36308030	MUSHROOMHEADED BOLT M8X30 A2 DIN 603
10	33208001	CAP NUT M8 A2 DIN 1587
11	4020599	GATE H110 PLATE/GRILLE 1250 MM WITH PIN LOCK IOF FIBER/IOF 10
12	30308020	SET SCREW M8X20 A2 DIN 933
13	97079	U-BRACKET FOR RECOPLATE
14	8470184	PLATE H735 L1250 INN-O-FLEX FIBER
15	4020596	GATE H110 GRILLE/PLATE 1200-1390 MM FOR PIN LOCK
16	8470185	PLATE H 735 L 800-1390 MM INN-O-FLEX FIBER
17	4020597	GATE H110 GRILLE/PLATE 1400-1590 MM FOR PIN LOCK
18	8470186	PLATE H735 L 1400-1590 MM INN-O-FLEX FIBER
19	4020598	GATE H110 GRILLE/PLATE 1600-1790 MM FOR PIN LOCK
20	8470187	PLATE H735 L1600-1790 MM INN-O-FLEX FIBER
21	4020669	GATE H110 PLATE/GRILLE 1450 MM WITH PIN LOCK IOF FIBER/IOF 10
22	8470312	PLATE 1450 MM H110 GATE
23	4020659	GATE H110 PLATE/GRILLE 1750 MM WITH PIN LOCK IOF FIBER/IOF 10
24	8470311	PLATE 1250 MM H110 GATE

Partition H110. Post/post


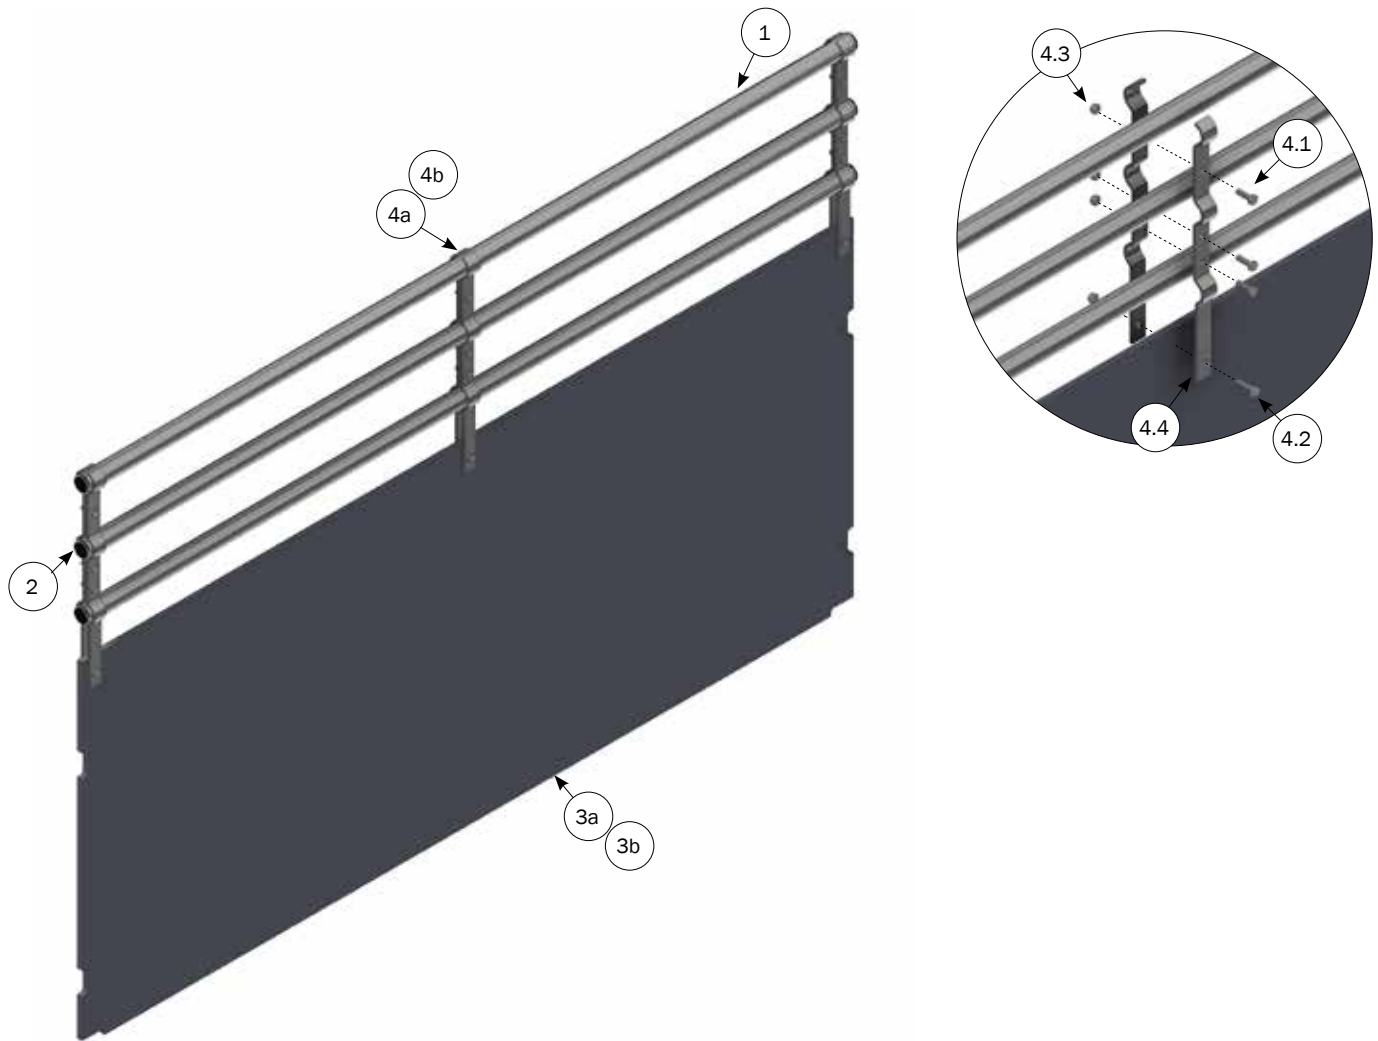


No.	Item No.	Description
1*	4610410	3 BARS 1" GALVANIZED PRICE PER METER . METER
2	4500653	3 ROUND CAP BLACK, 1" PIPE
3a	8470182	PLATE FOR PARTITION H110 PLATE 73.5 / 3 BARS POST/POST
3b	8470221	PLATE FOR PARTITION H110 PLATE 64.2 / 3 BARS, POST/POST
4a	4600483	3 PCS . 3 PCS STIFFENING BRACKET SET FOR 3 BARS ON PLATE
4.1	30308025	SET SCREW M8X25 A2 DIN 933
4.2	30308030	SET SCREW M8X30 A2 DIN 933
4.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED
4.4	64400	STIFFENING BRACKET 3 TOP BARS
4b	4500593	3 PCS . STIFFENING BRACKET SET FOR 3 BARS ON INN-O-FIBER PLATE
4.1	30308025	SET SCREW M8X25 A2 DIN 933
4.2	30308030	SET SCREW M8X30 A2 DIN 933
4.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED
4.4	4020055	STIFFENING BRACKET 3 TOP BARS INN-O-FIBER

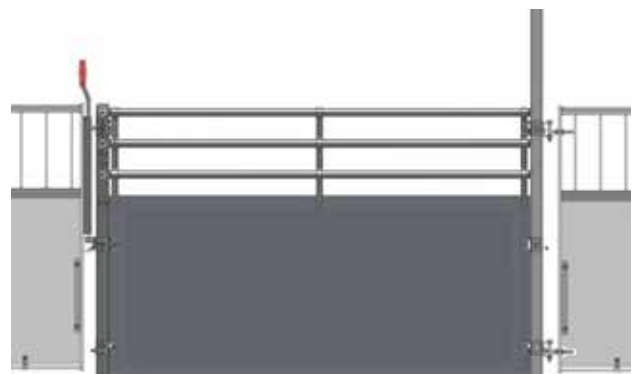


* Also available in stainless steel. See page 22.

Partition H110. Post/wall

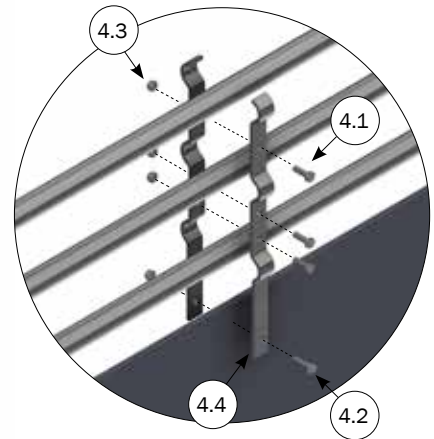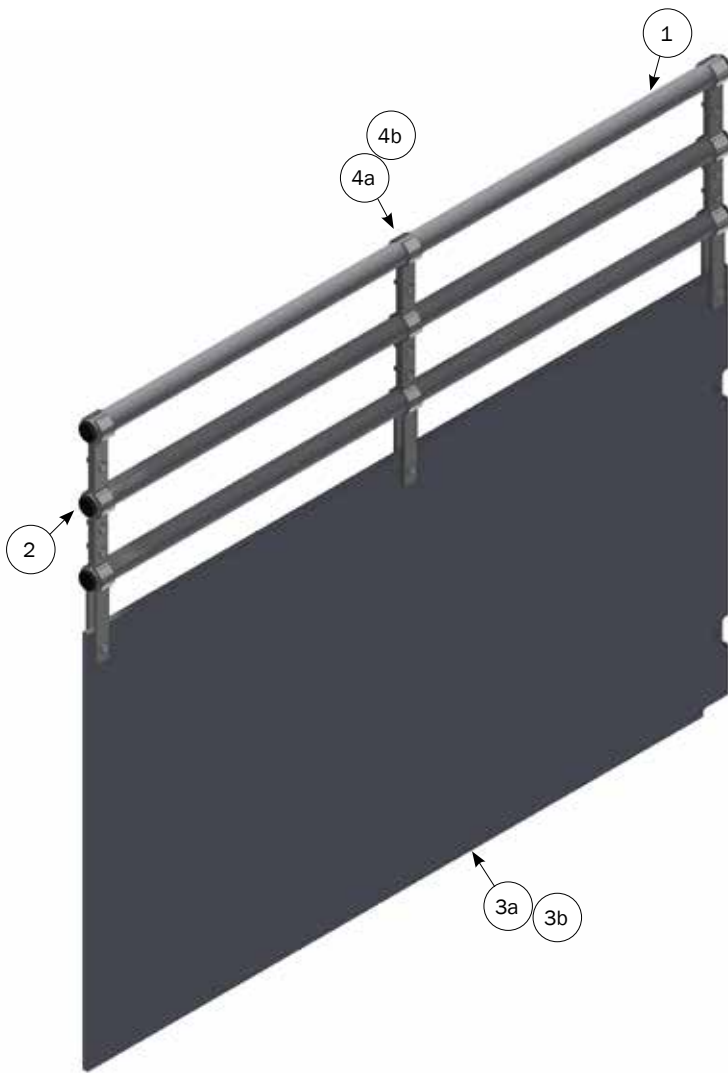


No.	Item No.	Description
1*	4610410	3 BARS 1" GALVANIZED PRICE PER METER . METER
2	4500653	3 ROUND CAP BLACK, 1" PIPE
3a	8470183	PLATE FOR PARTITION H110 PLATE 73.5 / 3 BARS POST/WALL
3b	8470222	PLATE FOR PARTITION H110 PLATE 64.2 / 3 BARS, POST/WALL
4a	4600483	3 PCS . 3 PCS STIFFENING BRACKET SET FOR 3 BARS ON PLATE
4.1	30308025	SET SCREW M8X25 A2 DIN 933
4.2	30308030	SET SCREW M8X30 A2 DIN 933
4.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED
4.4	64400	STIFFENING BRACKET 3 TOP BARS
4b	4500593	3 PCS . STIFFENING BRACKET SET FOR 3 BARS ON INN-O-FIBER PLATE
4.1	30308025	SET SCREW M8X25 A2 DIN 933
4.2	30308030	SET SCREW M8X30 A2 DIN 933
4.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED
4.4	4020055	STIFFENING BRACKET 3 TOP BARS INN-O-FIBER

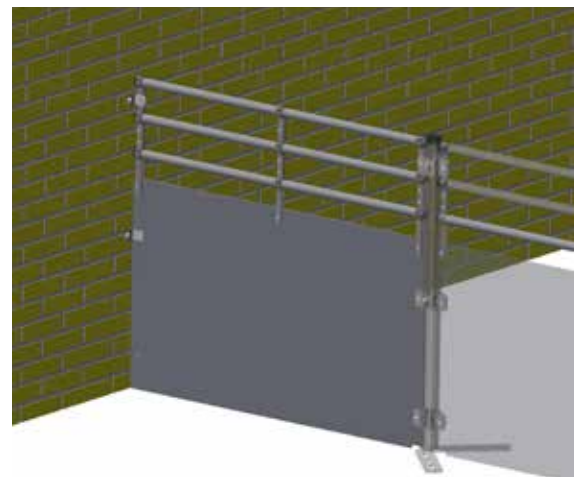


* Also available in stainless steel. See page 22.

Partition H110. Post/front part

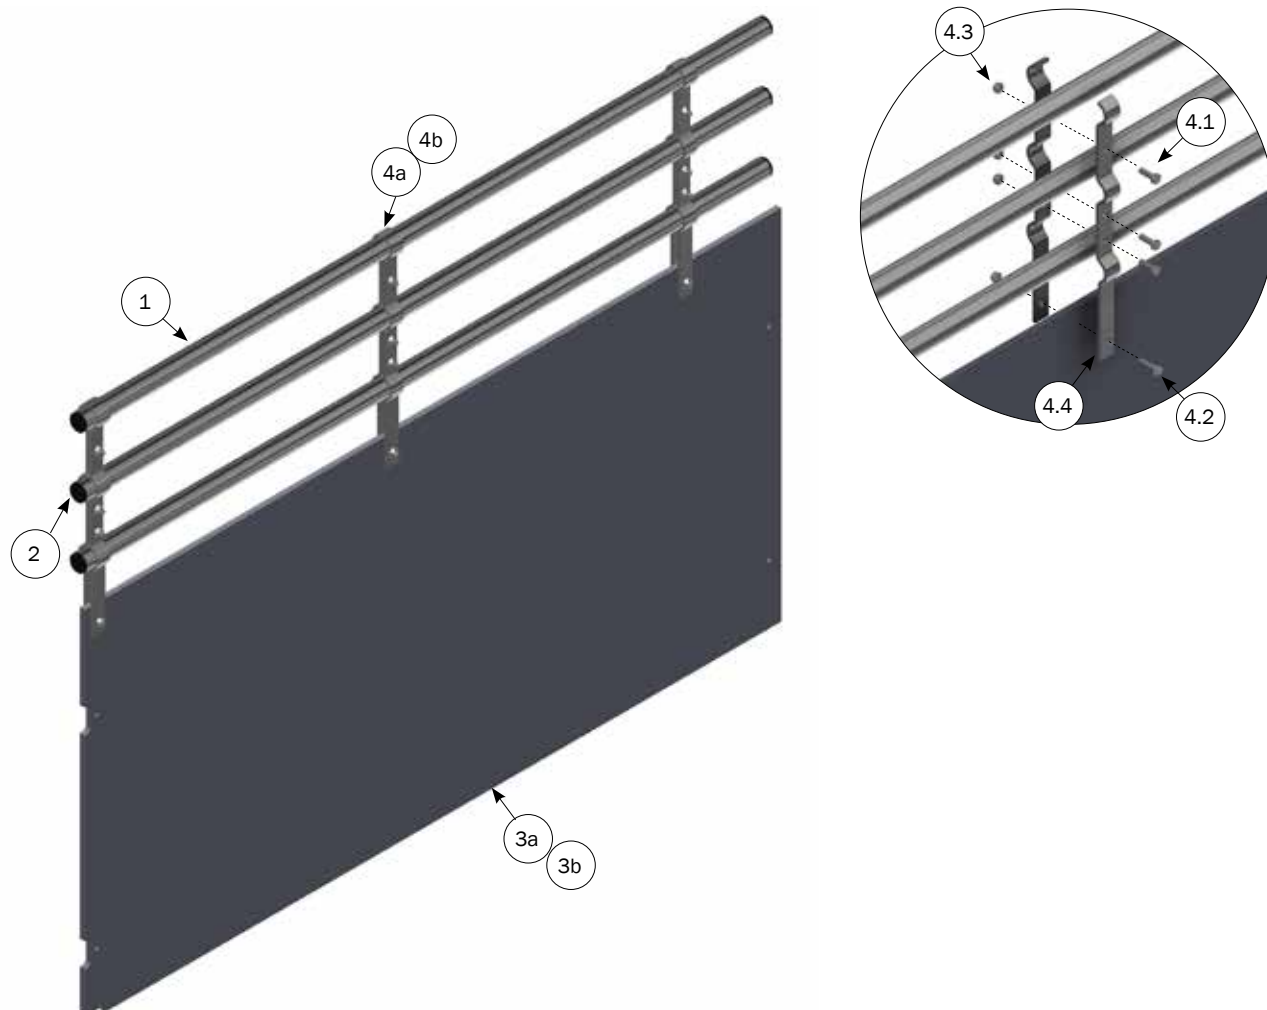


No.	Item No.	Description
1*	4610410	3 BARS 1" GALVANIZED PRICE PER METER . METER
2	4500653	3 ROUND CAP BLACK, 1" PIPE
3a	8470205	PLATE FOR PARTITION H110 PLATE 73.5 / 3 BARS POST/FRONT PART
3b	8470223	PLATE FOR PARTITION H110 PLATE 64.2 / 3 BARS, POST/FRONT PART
4a	4600483	3 PCS . 3 PCS STIFFENING BRACKET SET FOR 3 BARS ON PLATE
4.1	30308025	SET SCREW M8X25 A2 DIN 933
4.2	30308030	SET SCREW M8X30 A2 DIN 933
4.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED
4.4	64400	STIFFENING BRACKET 3 TOP BARS
4b	4500593	3 PCS . STIFFENING BRACKET SET FOR 3 BARS ON INN-O-FIBER PLATE
4.1	30308025	SET SCREW M8X25 A2 DIN 933
4.2	30308030	SET SCREW M8X30 A2 DIN 933
4.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED
4.4	4020055	STIFFENING BRACKET 3 TOP BARS INN-O-FIBER

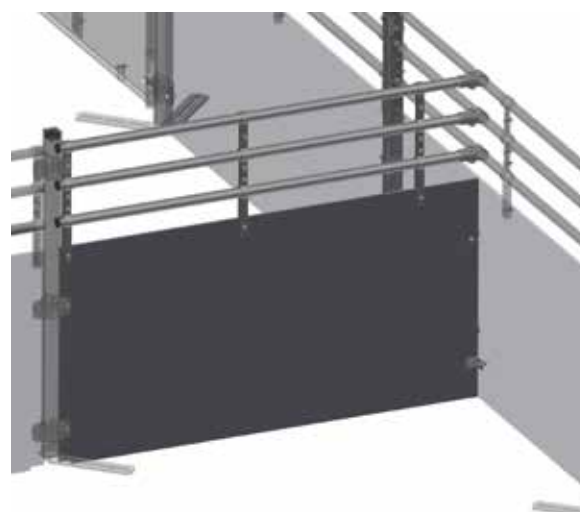




* Also available in stainless steel. See page 22.

Grille

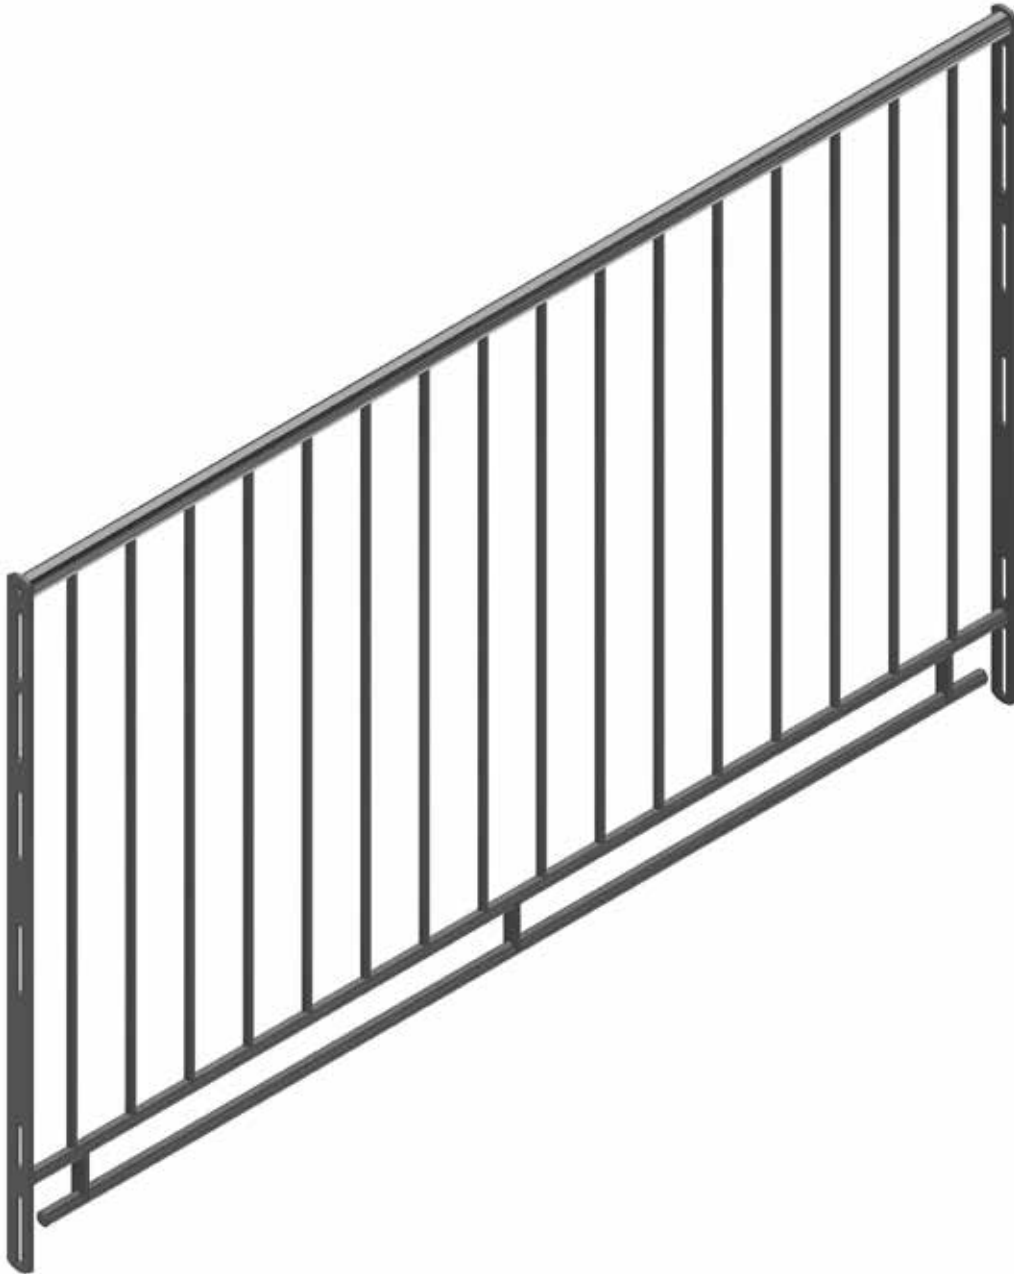




No.	Item No.	Description
1	4020939	GRILLE H110, L:200-1000 MM
2	4020940	GRILLE H110, L:1000 MM
3	4020941	GRILLE H110, L:1250 MM
4	4020942	GRILLE H110, L:1450 MM
5	4020943	GRILLE H110, L:1750 MM
6	4020944	GRILLE H110, L: 1750 - 2500 MM

Mounting a partition on a brick wall

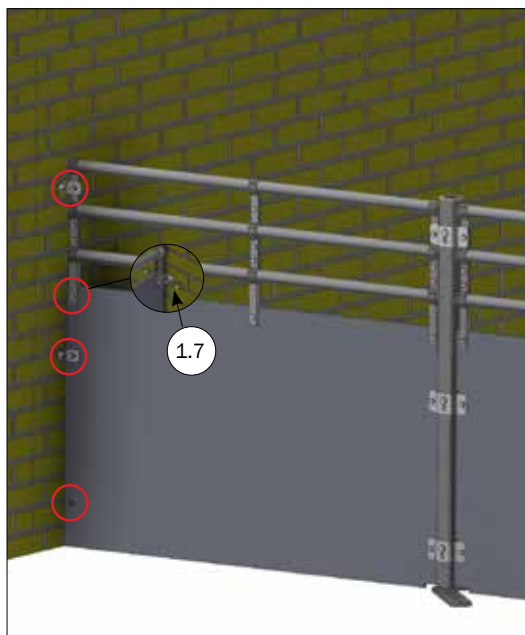


No.	Item No.	Description	Pcs.
1	4000059	MOUNTING KIT FOR H110 FIBER PARTITION AGAINST WALL	
1.1	30906	WALL BRACKET ANGLE/PARTITION	4
1.2	67444	10 X 70 BUTTONHEAD TORX 50 STAINLESS STEEL	4
1.3	39900001	WALL PLUG 12X60 MM	4
1.4	68552	COLLAR HEAD NUT M8 A2 DIN 6923	2
1.5	30308025	SET SCREW M8X25 A2 DIN 933	2
1.6	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	4
1.7	30308035	SET SCREW M8X35 A2 DIN 933	1
2	4000050	KIT FOR POST WITH 2 PARTITION IN CONTINUATION INN-O-FLEX FIBER	
2.1	4050050	DOUBLE SIDED ASSEMBLY PART INN-O-FLEX FIBER	6
2.2	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	12
2.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	6
2.4	30308030	SET SCREW M8X30 A2 DIN 933	6

Mounting a partition on the front part



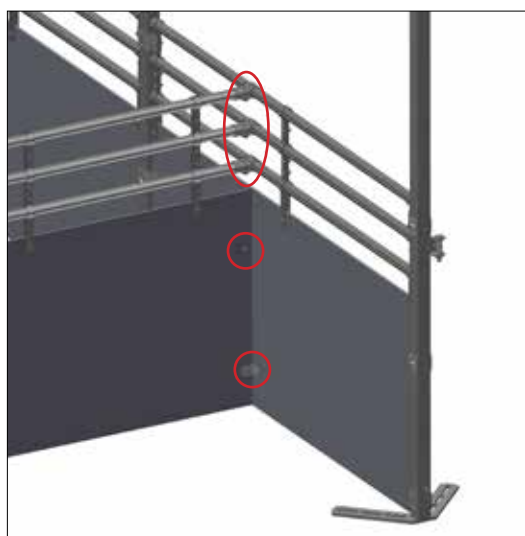


No.	Item No.	Description	Pcs.
	38553	MOUNTING KIT PLATE/3 BARS WITHOUT POST AGAINST FRONT PART	
1	20053	1" T-PIPE BEND SET INCL. SCREW	3
2	30308025	SET SCREW M8X25 A2 DIN 933	4
3	30900	WALL BRACKET SMALL	2
4	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	4
5	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	4

Mounting a partition on the front part at the corner, on the front part in the middle and on the grille






No.	Item No.	Description	Pcs.
	4000056	KIT FOR POST WITH PARTITION ON 2 SIDES CORNER INN-O-FLEX FIBER	
1	4050052	ANGLE ASSEMBLY PART INN-O-FLEX FIBER	3
2	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	12
3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	6
4	30308030	SET SCREW M8X30 A2 DIN 933	6
5	4050051	SINGLE SIDED ASSEMBLY PART INN-O-FLEX FIBER	6

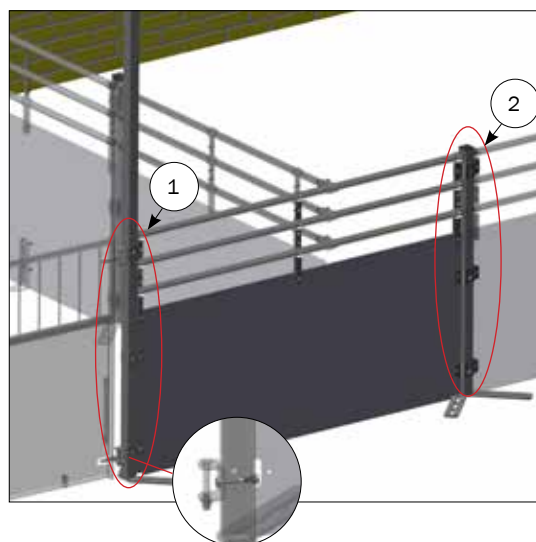

No.	Item No.	Description	Pcs.
1	4000052	KIT FOR POST WITH PARTITION ON 1 SIDE ON INN-O-FLEX FIBER	
1.1	4050051	SINGLE SIDED ASSEMBLY PART INN-O-FLEX FIBER	6
1.2	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	6
1.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	3
1.4	30308030	SET SCREW M8X30 A2 DIN 933	3
2	4000050	KIT FOR POST WITH 2 PARTITION IN CONTINUATION INN-O-FLEX FIBER	
2.1	4050050	DOUBLE SIDED ASSEMBLY PART INN-O-FLEX FIBER	6
2.2	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	12
2.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	6
2.4	30308030	SET SCREW M8X30 A2 DIN 933	6



10 X 65 bolt for fastening the set to the gate, must be placed on the post **BEFORE** the mounting brackets are fastened to the post.

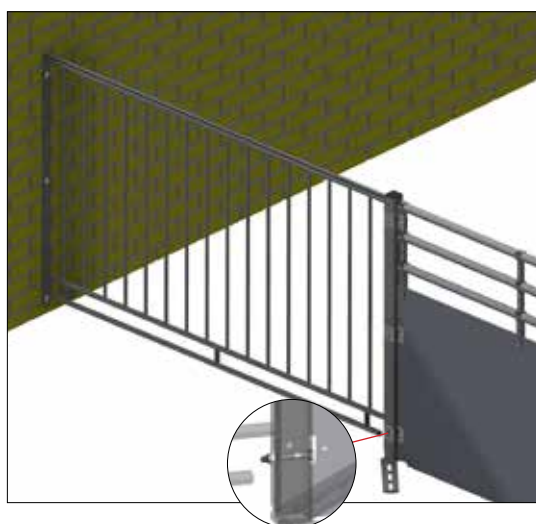

No.	Item No.	Description	Pcs.
1	4800015	10 PCS. STAINLESS STEEL COACH SCREWS M8 X 60 + DOWEL + WASHER	
1.1	34908061	COACH SCREW M8X60 A2 DIN 571	10(3)
1.2	35600058	FLAT WASHER Ø8.4X24X2 MM A2 DIN 9021	10(-)
1.3	39900120	WALL PLUG 10X50MM	10(3)
2	4000052	KIT FOR POST WITH PARTITION ON 1 SIDE ON INN-O-FLEX FIBER	
2.1	4050051	SINGLE SIDED ASSEMBLY PART INN-O-FLEX FIBER	6
2.2	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	6
2.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	3
2.4	30308030	SET SCREW M8X30 A2 DIN 933	3


10 X 75 Bolt for securing the grill, must be placed on the post **BEFORE** the mounting brackets are attached to the post.

Installation of four partitions in a corner around a post

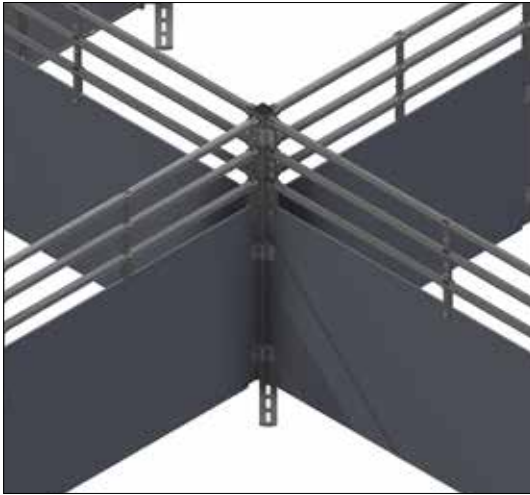



No.	Item No.	Description	Pcs.
	4000057	KIT FOR POST WITH PARTITION IN 4 SIDES INN-O-FLEX FIBER	
1	4050052	ANGLE ASSEMBLY PART INN-O-FLEX FIBER	12
2	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	24
3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	12
4	30308030	SET SCREW M8X30 A2 DIN 933	12

Installation of three partitions assembled in a corner around a post




No.	Item No.	Description	Pcs.
	4000051	KIT FOR POST WITH PARTITION ON 3 SIDES INN-O-FLEX FIBER	
1	4050050	DOUBLE SIDED ASSEMBLY PART INN-O-FLEX FIBER	3
2	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	18
3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	9
4	30308030	SET SCREW M8X30 A2 DIN 933	9
5	4050052	ANGLE ASSEMBLY PART INN-O-FLEX FIBER	6



Mounting kit for gate with pin lock




Brackets are mounted with bolts, posts are turned so that foot plates face outwards/inwards.




Mounting of drop latch "make new hole with M10 thread at the place .

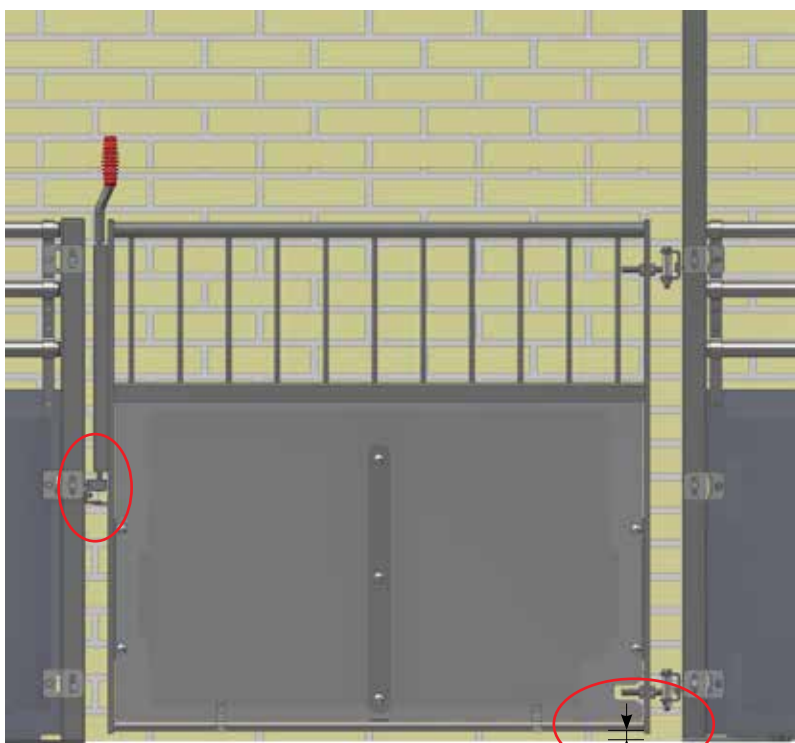


The distance between the floor and bottom edge of the gate is 30 mm






The distance between the floor and bottom edge of gate is 40 mm



The distance between the floor and bottom edge of the gate is 10 mm





The distance between the floor and bottom edge of gate is 20 mm


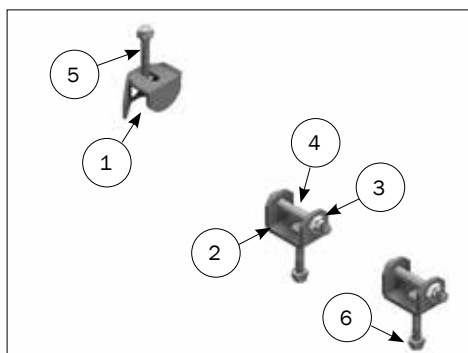




No.	Item No.	Description	Pcs.
	4000058	KIT FOR GATE WITH PIN LOCK INN-O-FLEX FIBER	
1	1915043	DROP LATCH 40 MM FOR POST, GALVANIZED	1
2		INN-O-FLEX HINGE BRACKET	2
3	33912000	LOCK NUT M12 A2 DIN 985 WAX-TREATED	2
4	67549	MACHINE BOLT M12X80 A2 DIN 931	2
5	32310065	MACHINE BOLT M10X65 A2 DIN 931	3
6	33900029	LOCK NUT M10 A2 DIN 985 WAX-TREATED	3

Mounting of gate with pin lock against wall





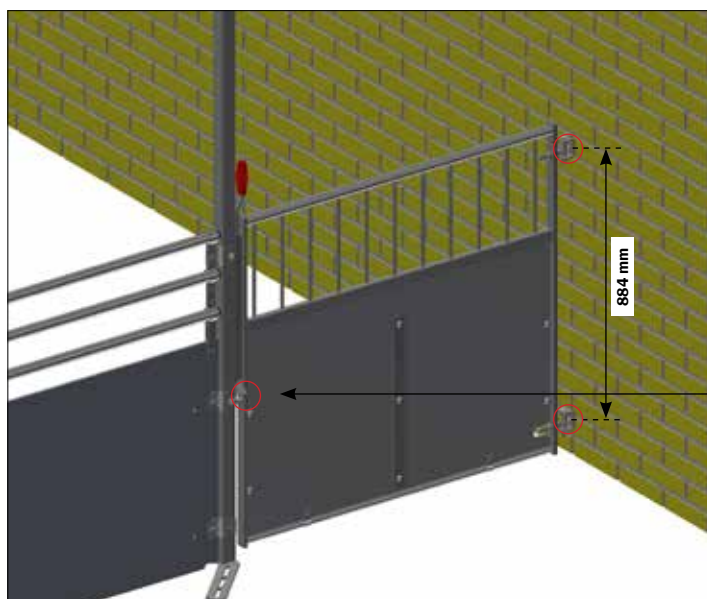


Distance from edge of wall to bracket min. 100 mm
Distance from floor to center hole on bracket is 102 mm

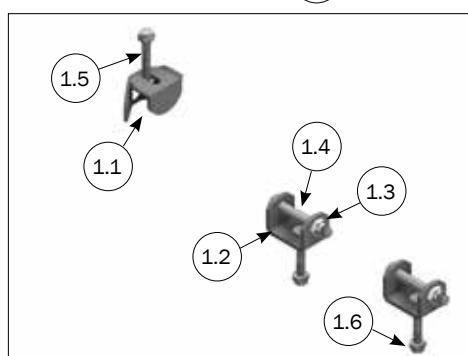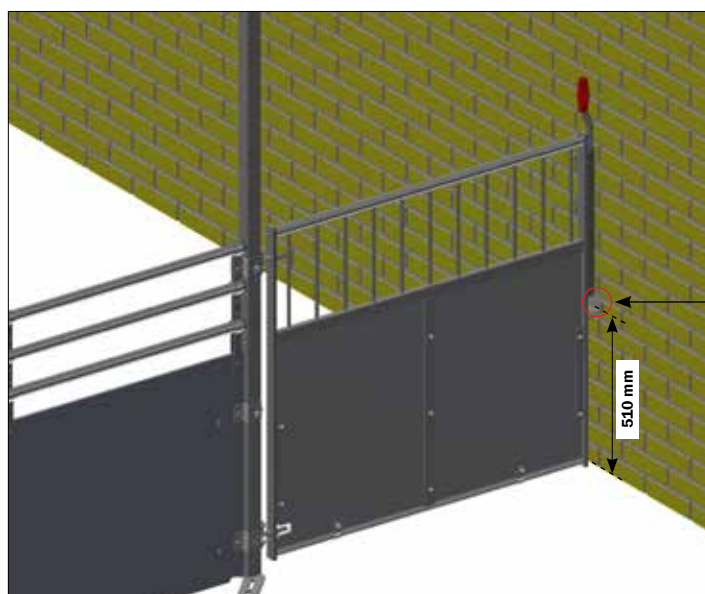


No.	Item No.	Description	Pcs.
1	4000058	KIT FOR GATE WITH PIN LOCK INN-O-FLEX FIBER	
1.1	1915043	DROP LATCH 40 MM FOR POST, GALVANIZED	1
1.2		INN-O-FLEX HINGE BRACKET	2
1.3	33912000	LOCK NUT M12 A2 DIN 985 WAX-TREATED	2
1.4	67549	MACHINE BOLT M12X80 A2 DIN 931	2
1.5	32310065	MACHINE BOLT M10X65 A2 DIN 931	3
1.6	33900029	LOCK NUT M10 A2 DIN 985 WAX-TREATED	3
2	4800010	10 PCS. STAINLESS STEEL BUTTONHEAD SCREWS 10 X 70 AND WALL PLUG	
2.1	39900001	WALL PLUG 12X60 MM	(10)2
2.2	67444	10 X 70 BUTTONHEAD TORX 50 STAINLESS STEEL	(10)2

Stabilization post

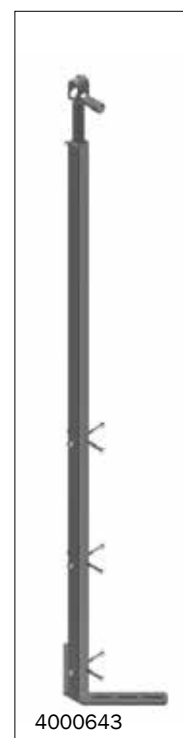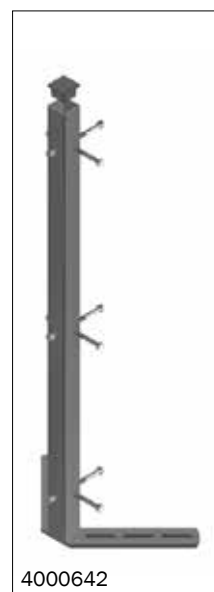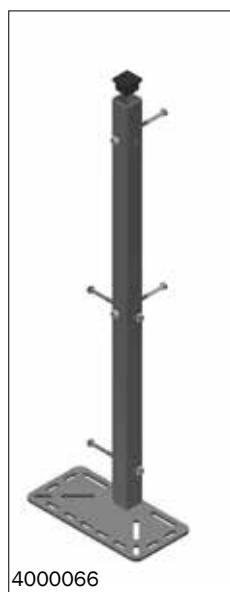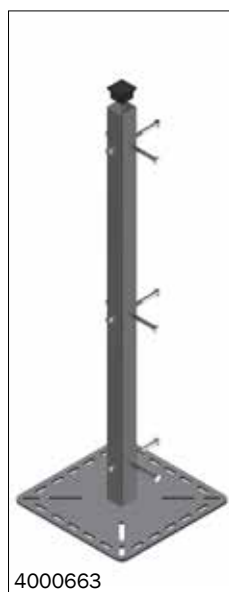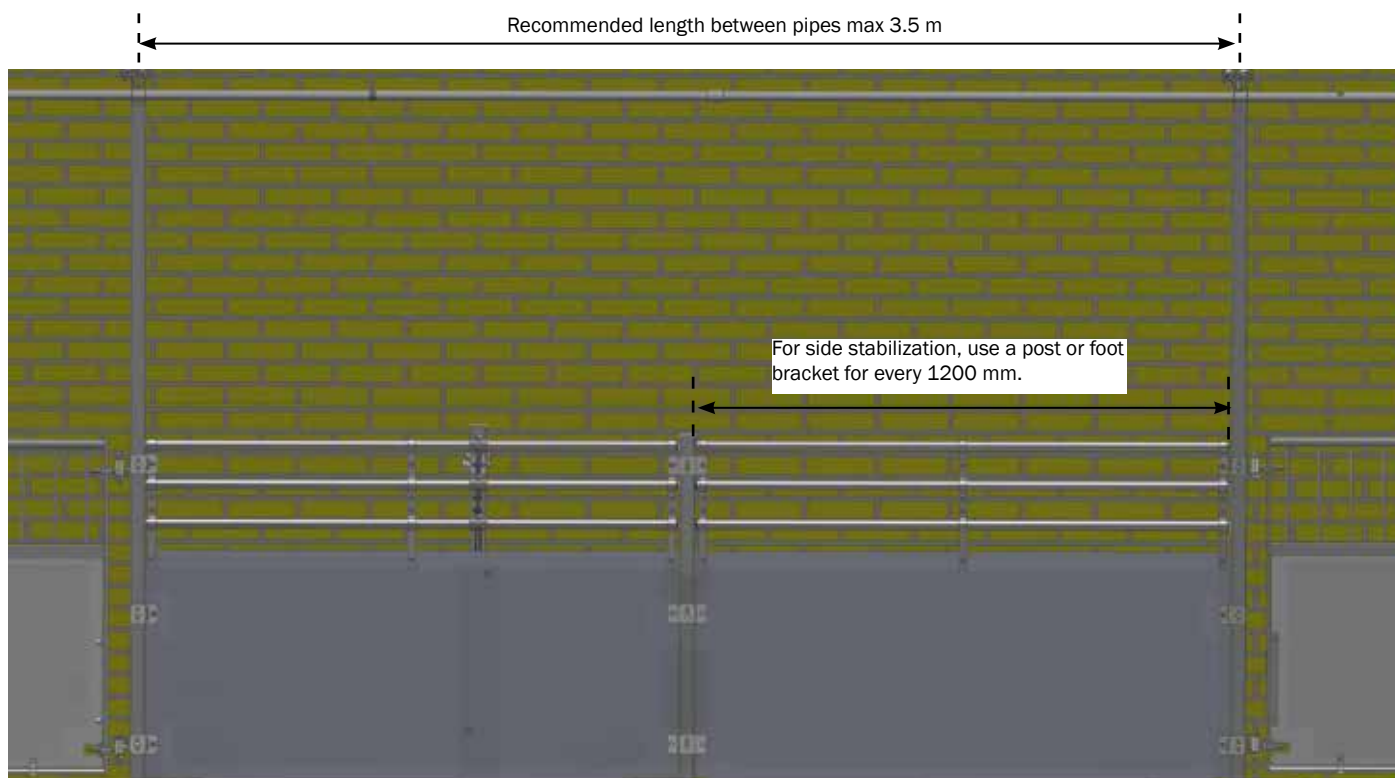

Requires 4 French screws / T-bolts

If drilling into the slats is necessary, we recommend using glue anchors or a yoke 30862.

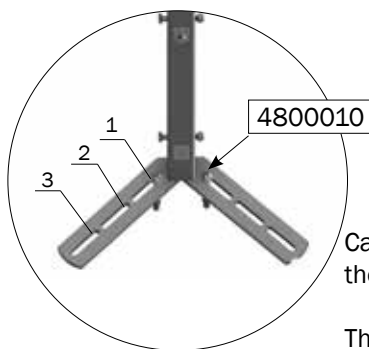


Can use 3 positions to secure the post to the floor.

The closer the screws are placed to the post, the more stable the post will be.

Installation of low post




Bracket is mounted with bolt from post






No.	Item No.	Description	Pcs.
	4000454	MOUNTING KIT FOR POST AGAINST WALL	2
1	67444	10 X 70 BUTTONHEAD TORX 50 STAINLESS STEEL	2
2	4020299	WALL FITTING FOR FRAME	1
3	39900001	WALL PLUG 12X60 MM	2

No.	Item No.	Description	Pcs.
1	4000642	LOW POST INCL. SCREWS AND NUTS	
1.1	32310075	MACHINE BOLT M10X75 A2 DIN 931	4
1.2	33900029	LOCK NUT M10 A2 DIN 985 WAX-TREATED	4
1.3	4020642	LOW POST	1
1.4	9960005	CAP 50X50X5MM	1
2	4000663	LOW POST WITH LARGE FOOT PLATE INCL. SCREWS AND NUTS	
2.1	32310075	MACHINE BOLT M10X75 A2 DIN 931	4
2.2	33900029	LOCK NUT M10 A2 DIN 985 WAX-TREATED	4
2.3	9960005	CAP 50X50X5MM	1
2.4	4020663	LOW POST WITH LARGE FOOT PLATE	1
3	4000065	LOW CORNER POST WITH FOOT PLATE INCL. SCREWS AND NUTS	
3.1	32310075	MACHINE BOLT M10X75 A2 DIN 931	4
3.2	33900029	LOCK NUT M10 A2 DIN 985 WAXED	4
3.3	9960005	CAP 50X50X5MM	1
3.4	4020065	LOW CORNER POST WITH FOOT PLATE	1
4	4000066	LOW POST WITH HALF LARGE FOOT PLATE INCL. SCREWS AND NUTS	
4.1	32310075	MACHINE BOLT M10X75 A2 DIN 931	4
4.2	33900029	LOCK NUT M10 A2 DIN 985 WAXED	4
4.3	9960005	CAP 50X50X5MM	1
4.4	4020066	LOW POST WITH HALF LARGE FOOT PLATE	1


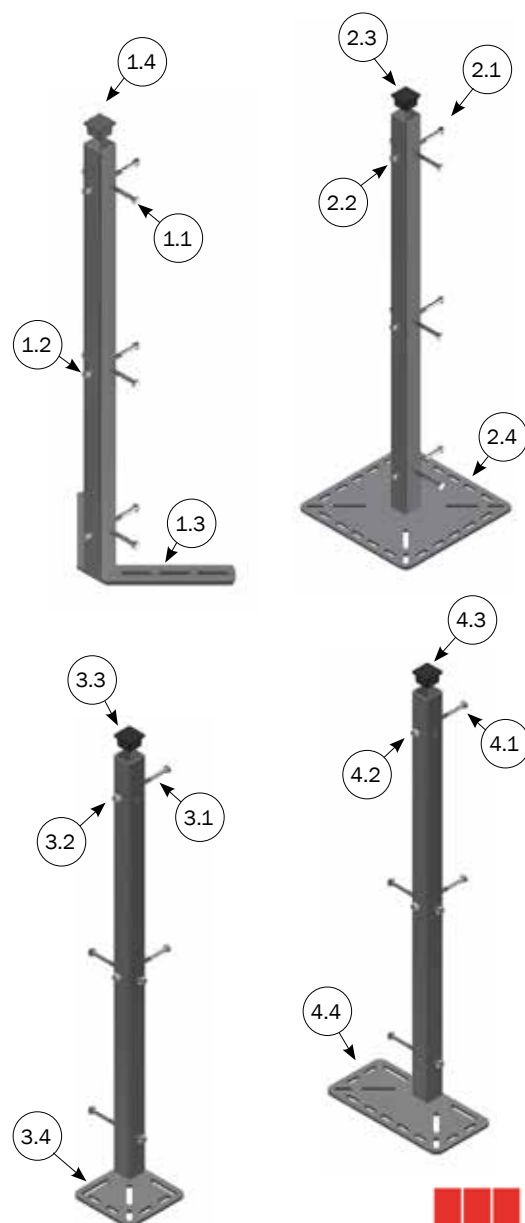


Installation of high post

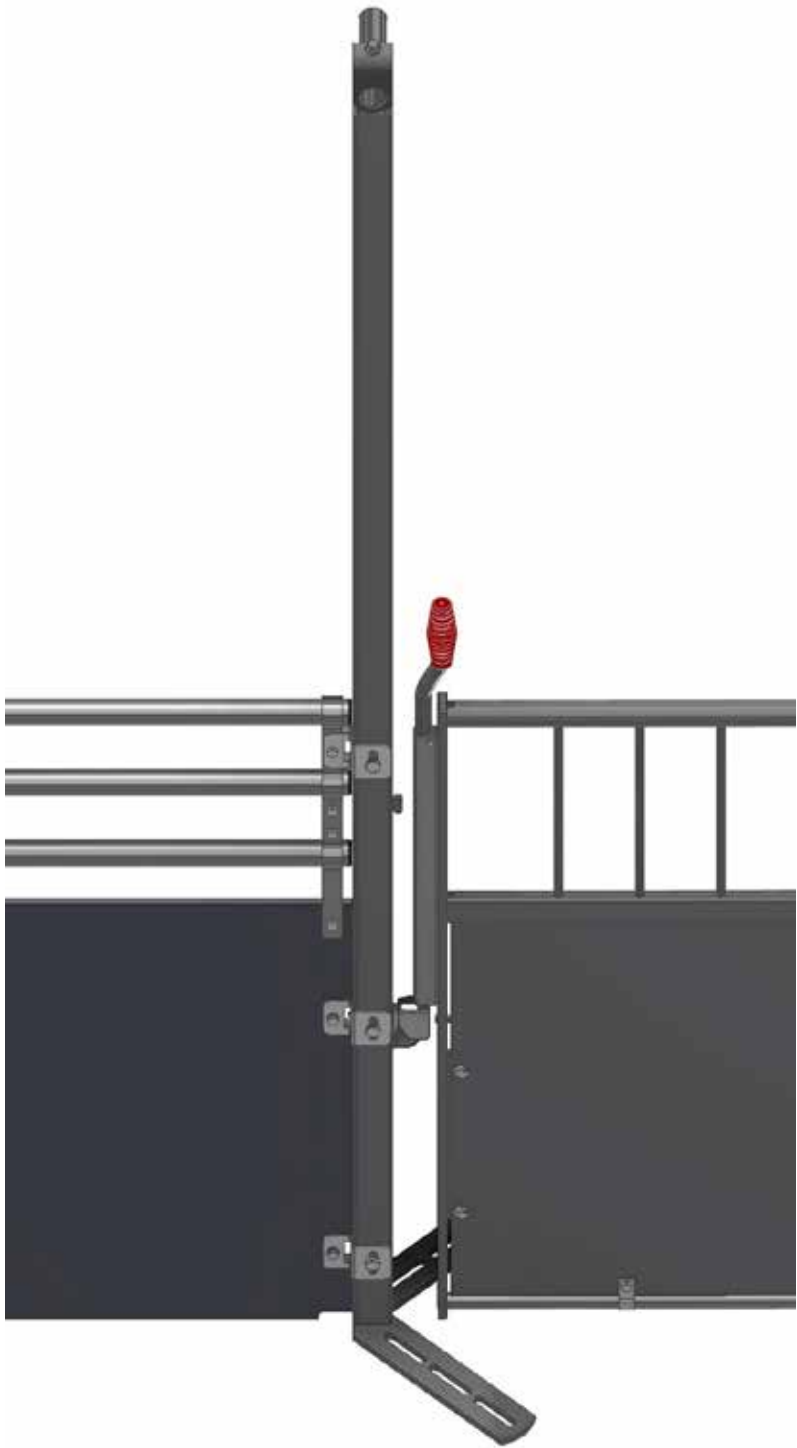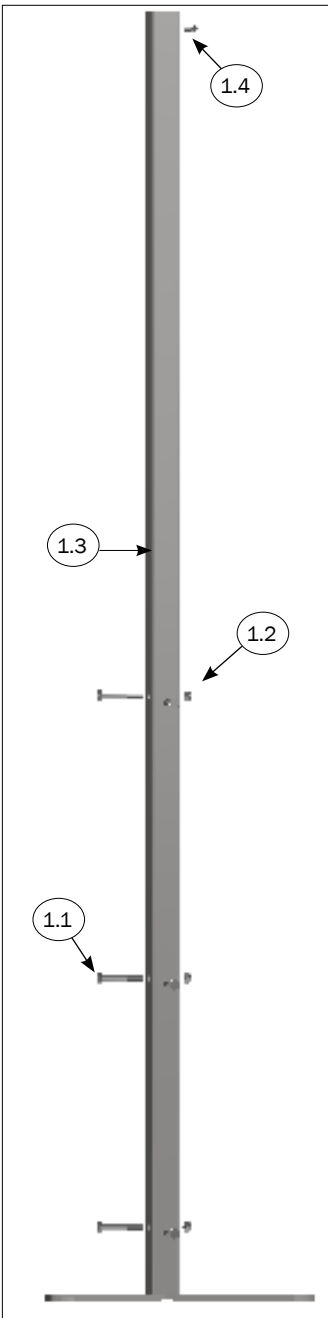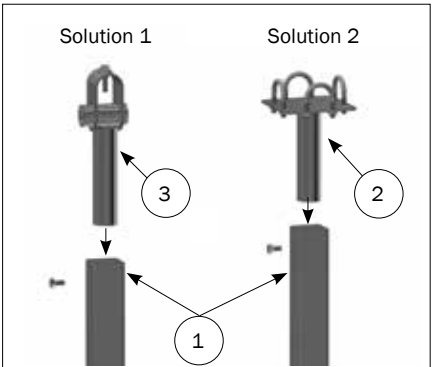


No.	Item No.	Description	Pcs.
1	4000643	HIGH POST INCL. SCREWS AND NUTS	
1.1	32310075	MACHINE BOLT M10X75 A2 DIN 931	1
1.2	33900029	LOCK NUT M10 A2 DIN 985 WAX-TREATED	4
1.3	4020643	HIGH POST	4
1.4	30308016	SET SCREW M8X16 A2 DIN 933	1
2	1900320	CROSS CONNECTION WITH 1" U-BOLT	1
3	1900080	CROSS BRACKET 1"X1" WITH Ø38 TUBE, INCL. BOLTS	1


Mounting of pipes on high post

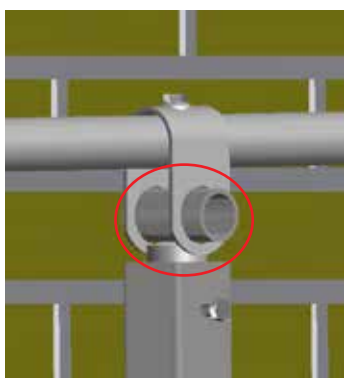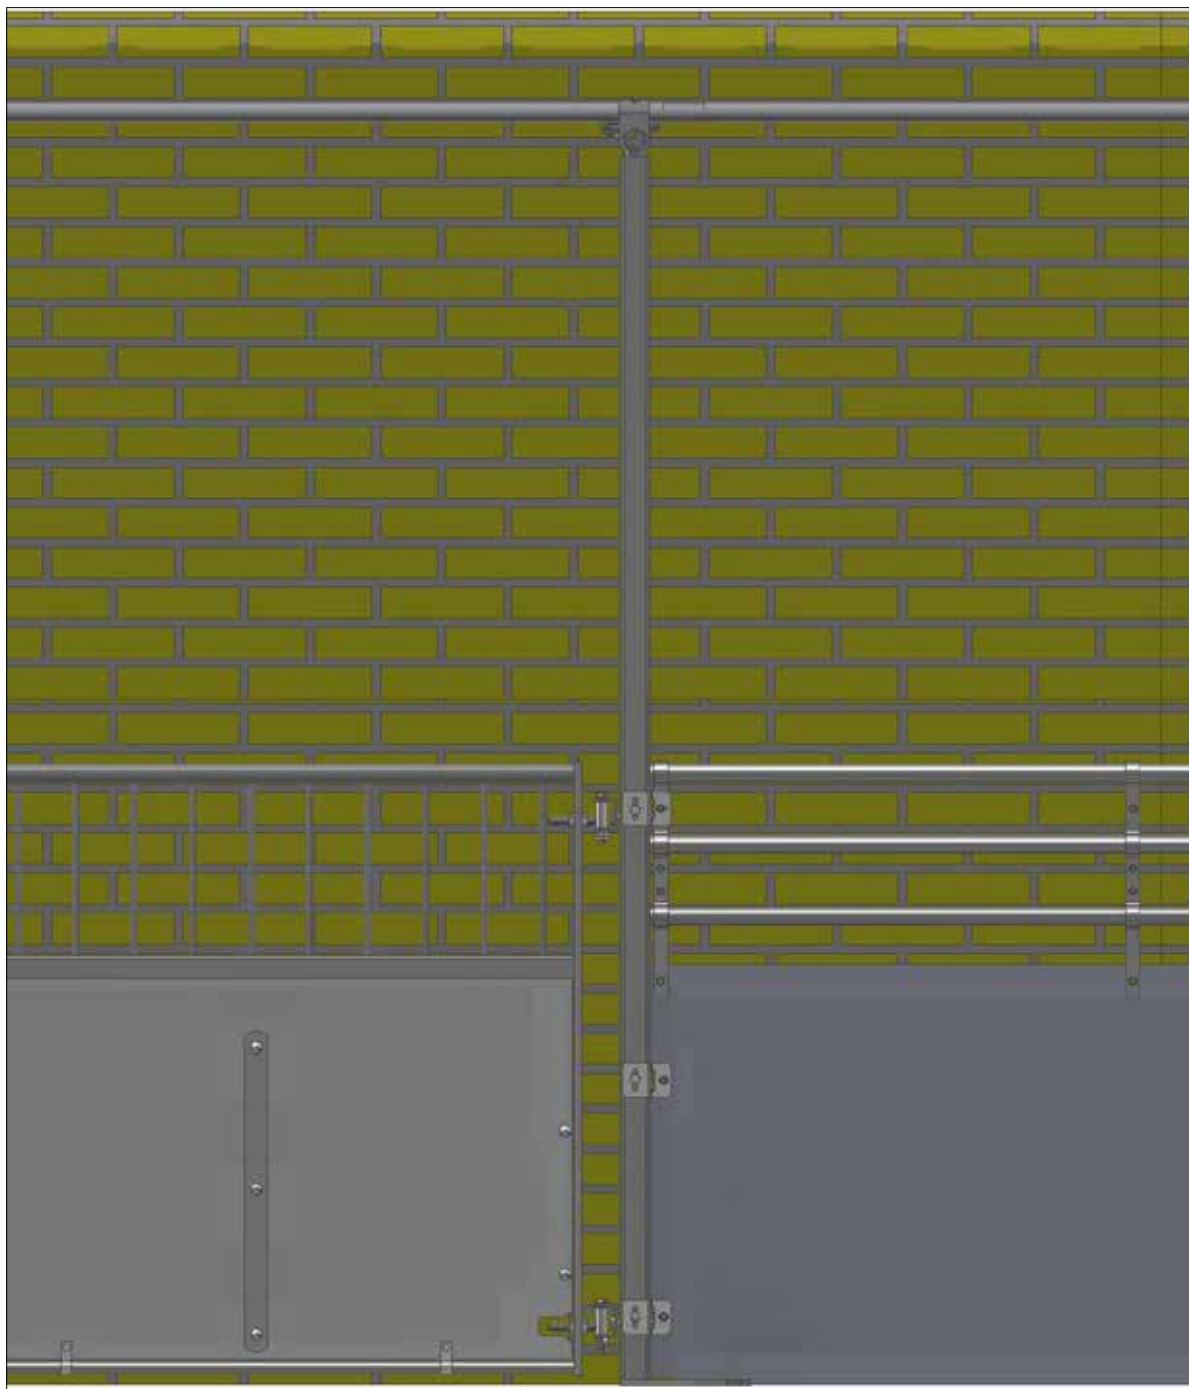

PIPE 70 MM only used when
mounting a 1 pipe

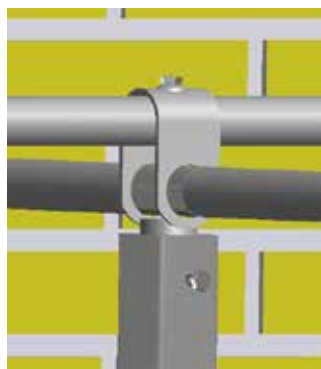


Mounting of pipes on high post

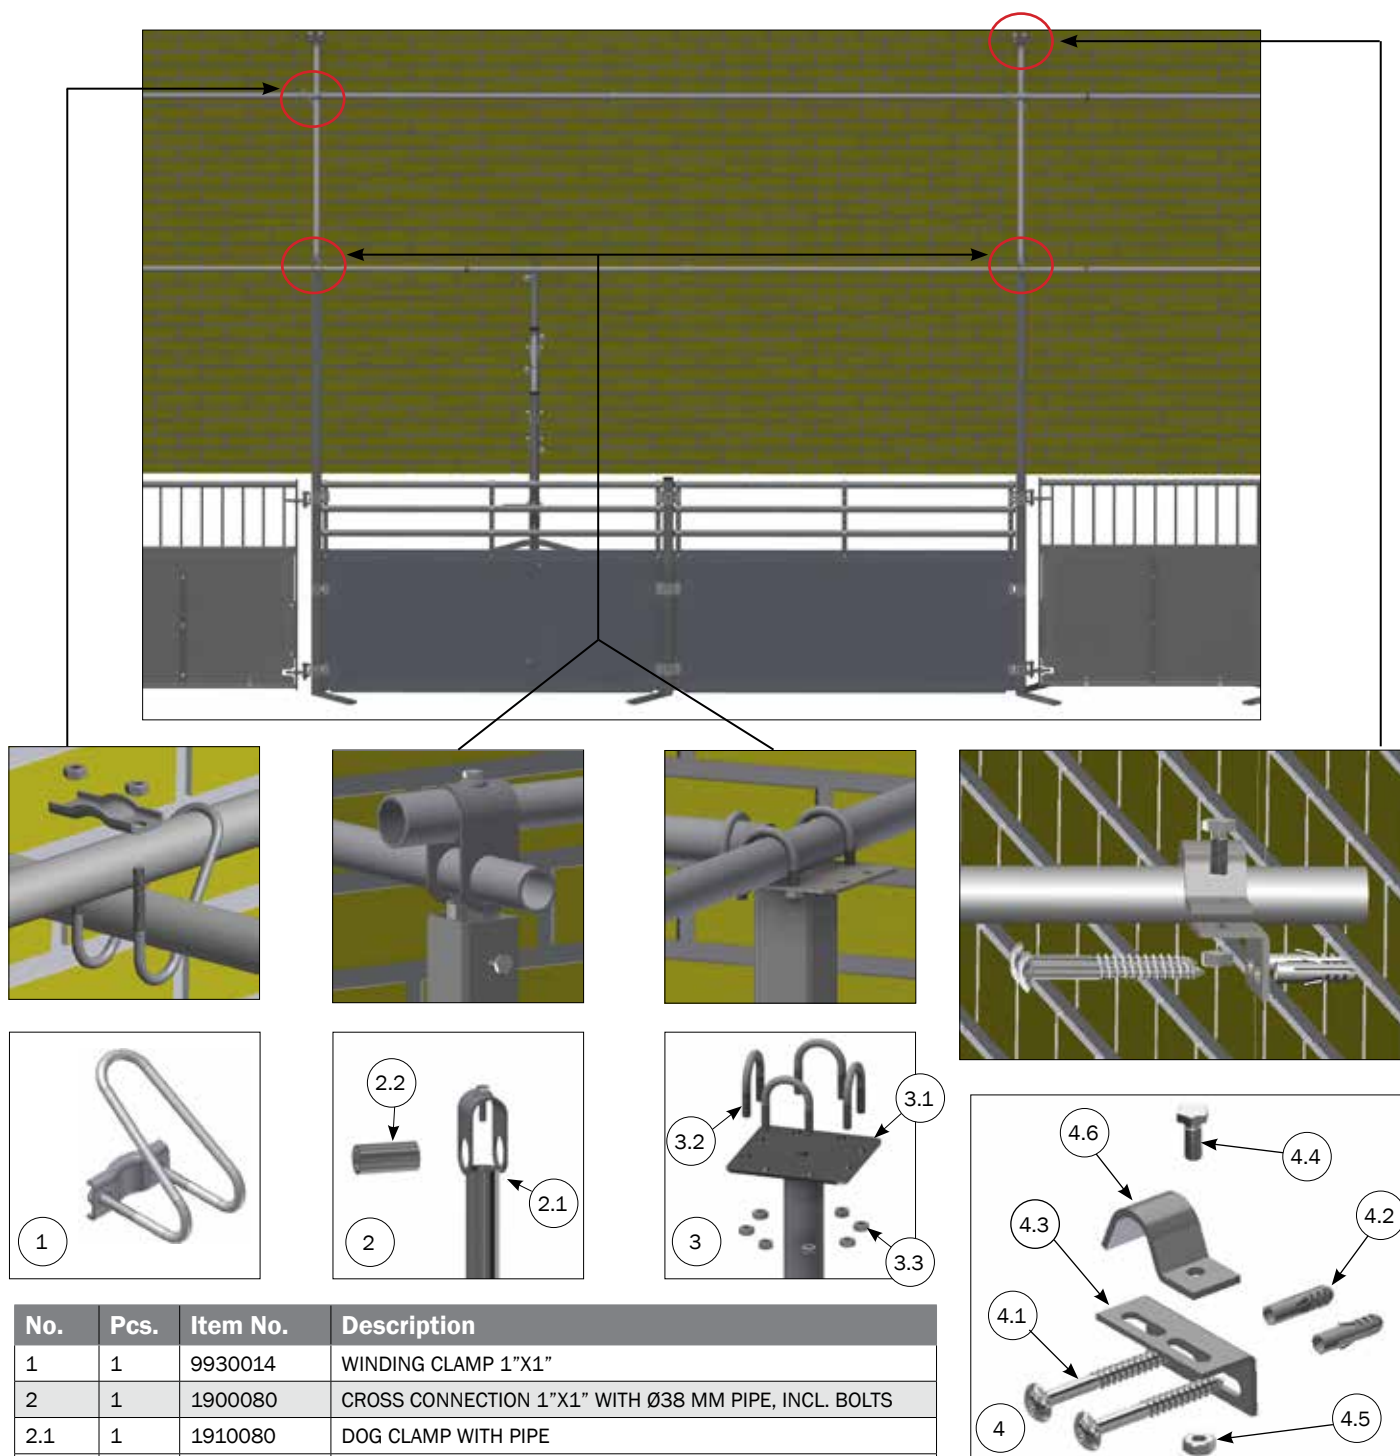


No.	Pcs.	Item No.	Description
1	1	9930014	WINDING CLAMP 1"X1"
2	1	1900080	CROSS CONNECTION 1"X1" WITH Ø38 MM PIPE, INCL. BOLTS
2.1	1	1910080	DOG CLAMP WITH PIPE
2.2	1	8100240	1" GALVANISED PIPE L=70 MM
3	1	1900320	CROSS CONNECTION WITH 1" U-BOLT
3.1	1	1920320	CROSS CONNECTION FOR 1" U-BOLT, SUPPORT
3.2	4	90100049	U-CLAMP 1" 8X50 MM GALVANISED
3.3	8	33208014	NUT M8 HDG DIN 934
4	1	3900019	FITTING FOR WATER PIPE, COMPLETE
4.1	2	67444	10 X 70 BUTTONHEAD TORX 50 STAINLESS STEEL
4.2	2	39900001	WALL PLUG 12X60 MM
4.3	1	3920096	WALL FITTING FOR WATER PIPE
4.4	1	30310025	SET SCREW M10X25 A2 DIN 933
4.5	1	33510017	NUT M10 A2 WAXED . DIN 934
4.6	1	16375	PIPE RETAINER 1" WITHOUT BOLT



Stabilisation of posts where the pipe can reach the wall

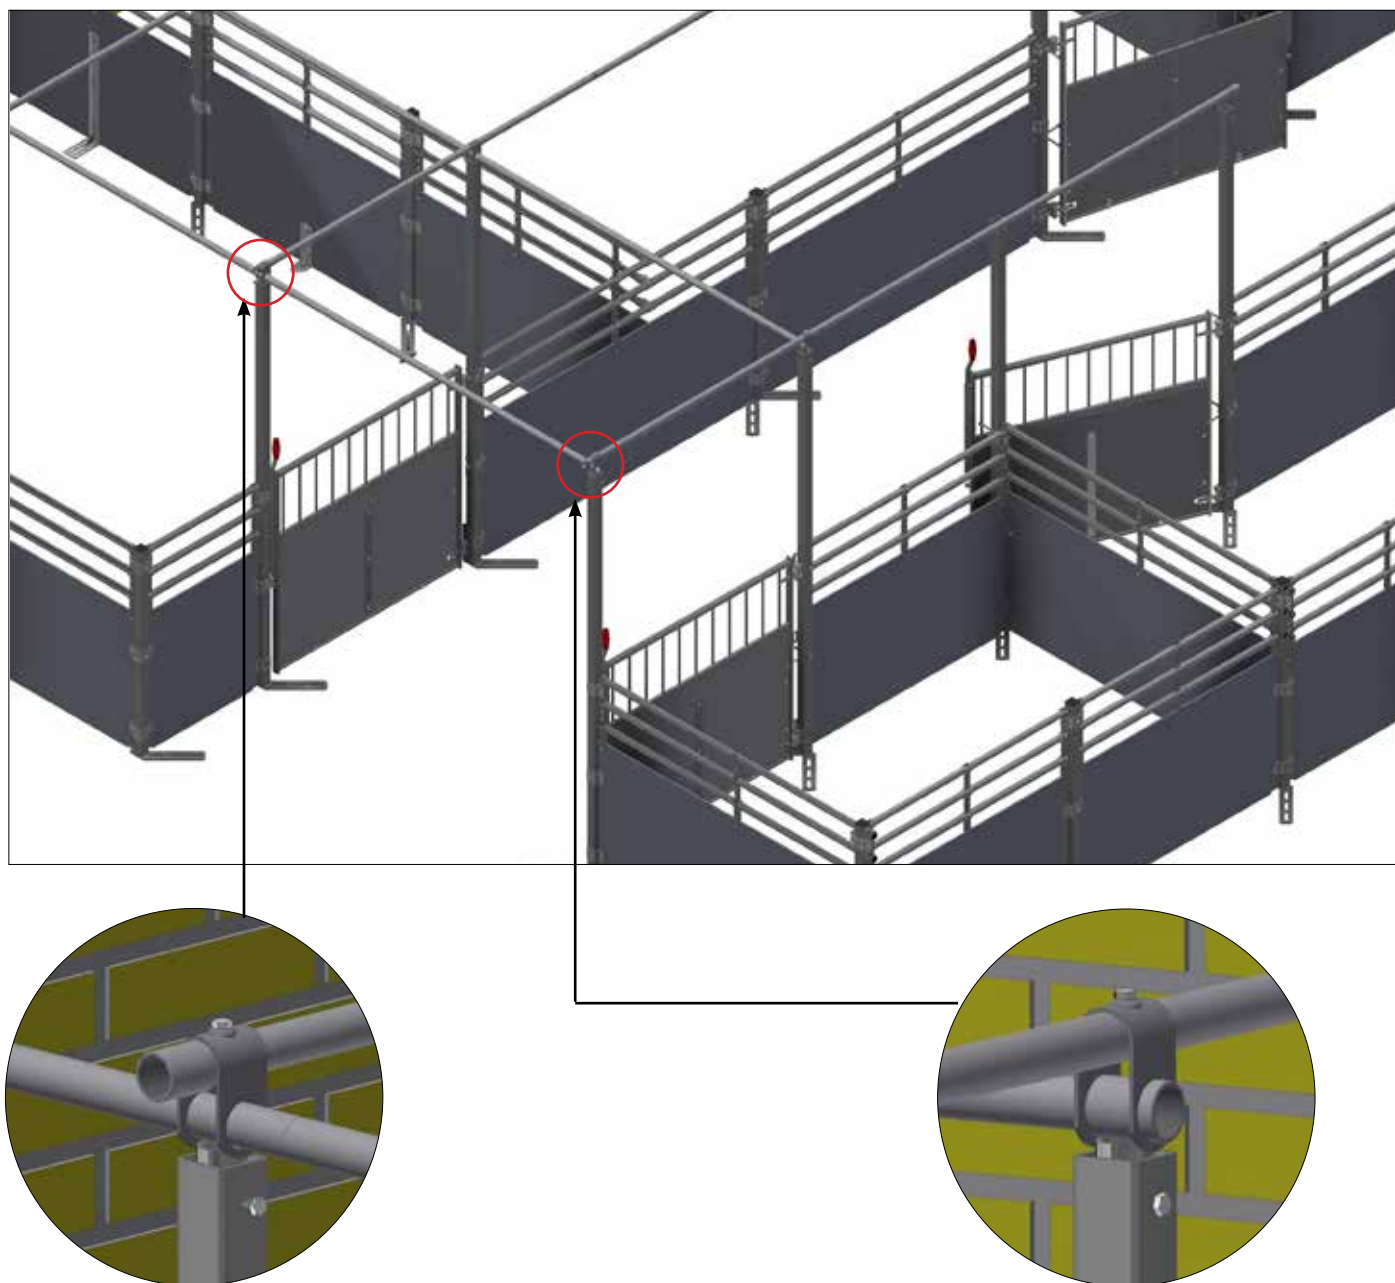


Alignment of post base plate for optimum stabilisation

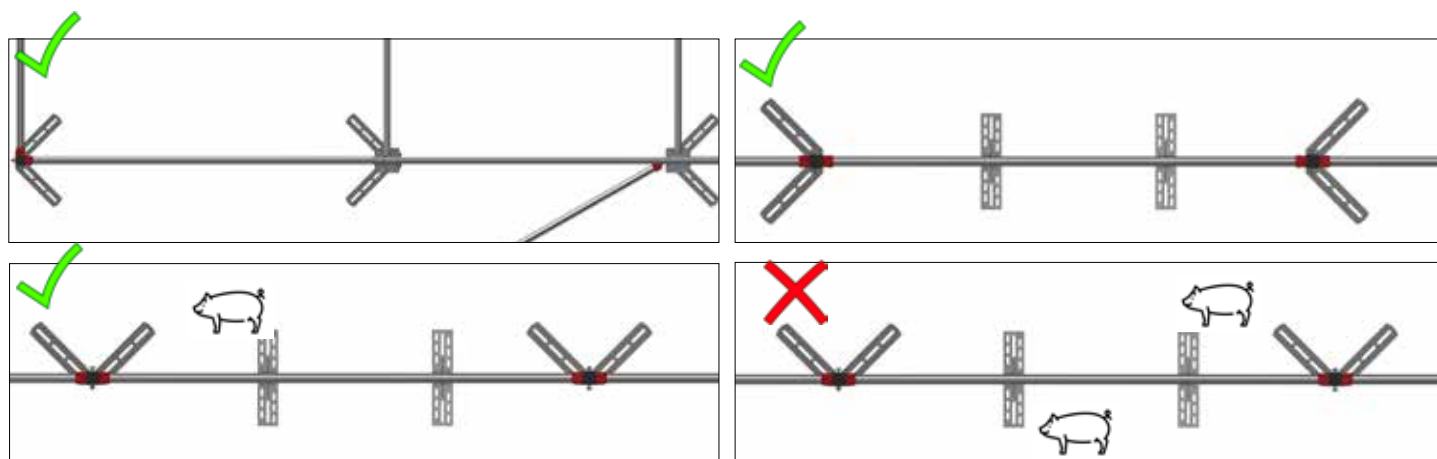




Stabilisation of posts where the pipe cannot reach the wall

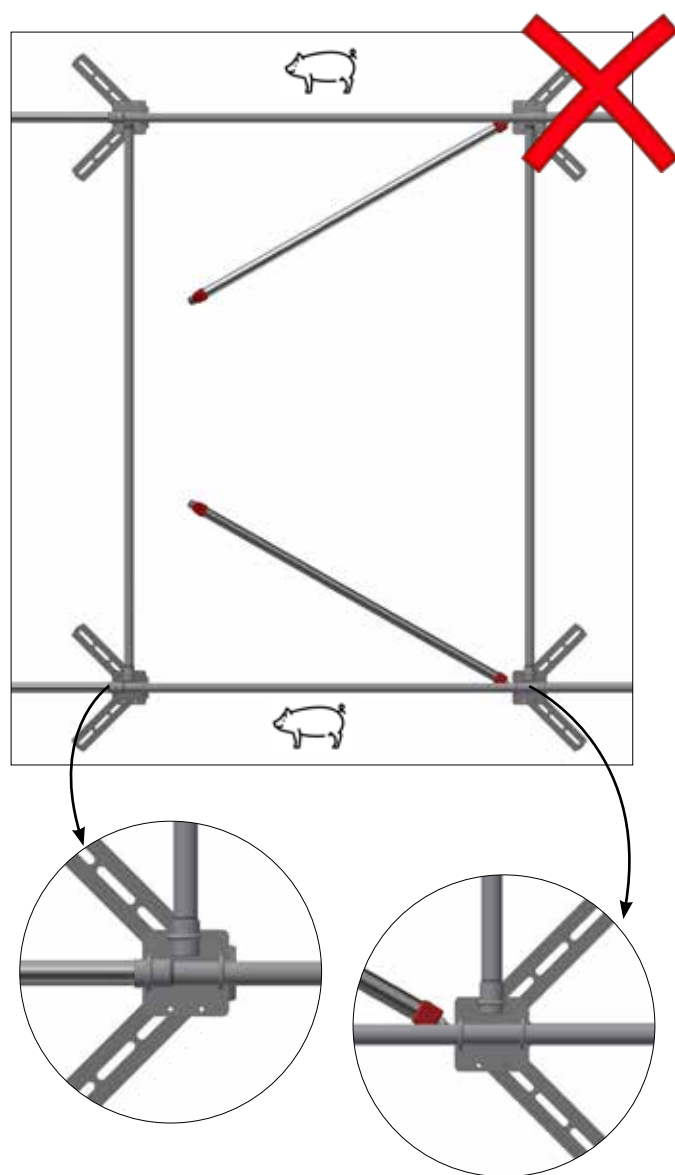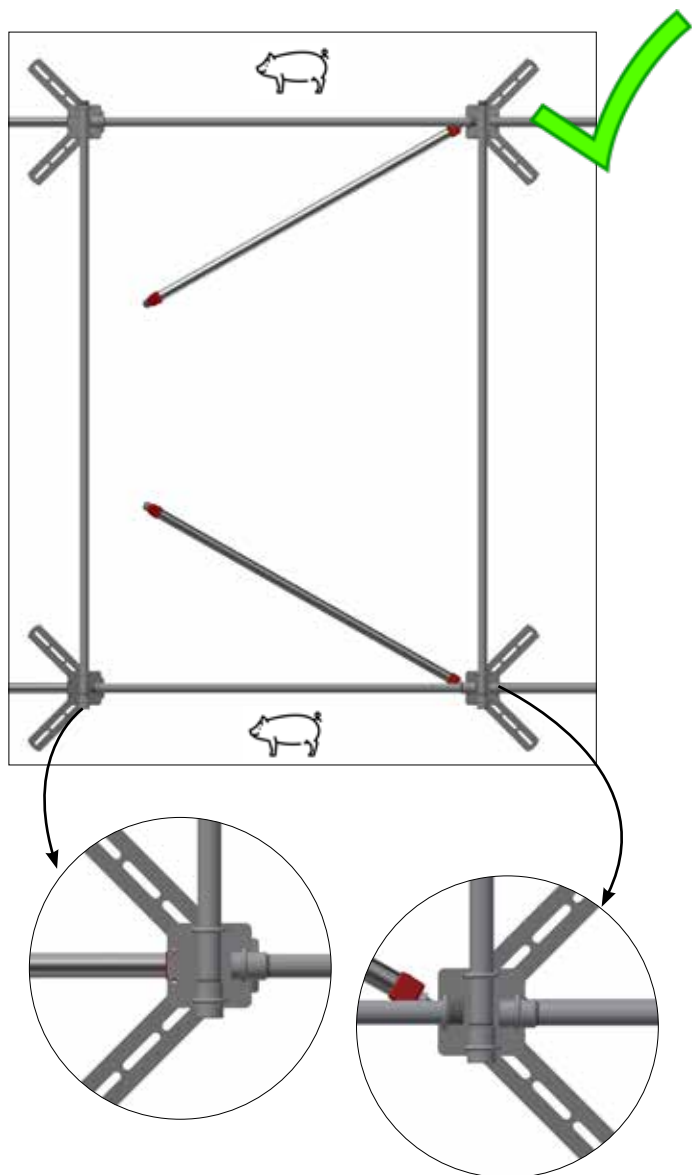

Stabilisation of side

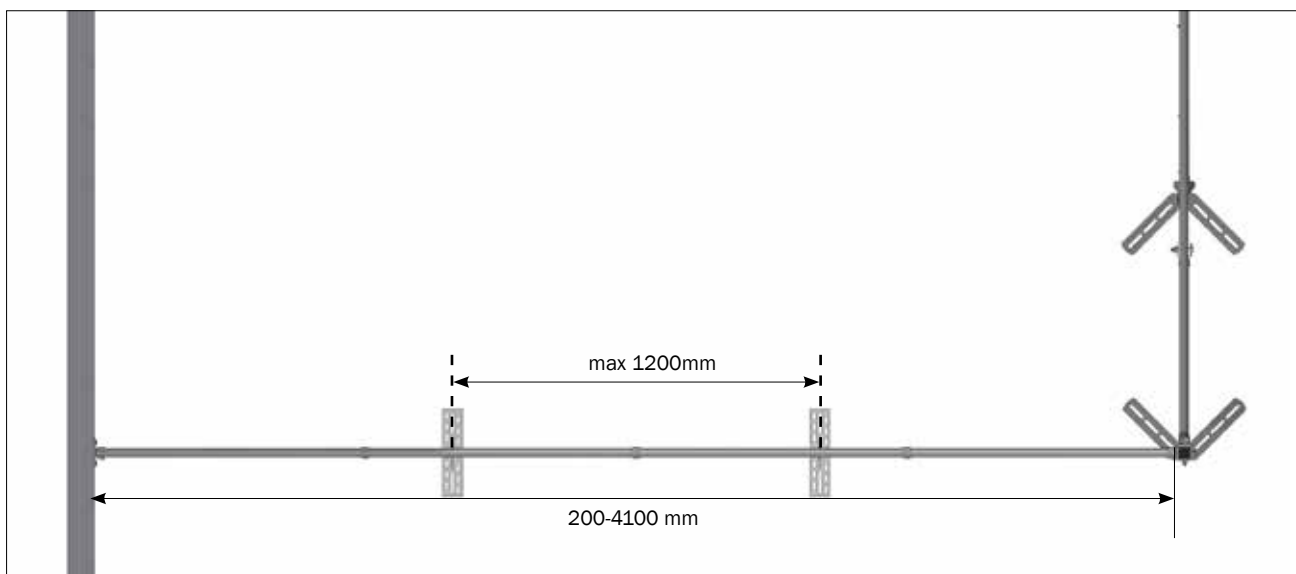


For side stabilization, use a post or foot bracket for every 1200 mm.



No.	Item No.	Description	Pcs.
1	4901802	SUPPORT FOOT FOR SLOTS, FIBER	
1.1	30308025	SET SCREW M8X25 A2 DIN 933	4
1.2	30802	LOOSE FOOT PLATE FOR SLOTS	1
1.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	4
1.4	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	4
2	4901806	SUPPORT FOOT FOR CONCRETE, FIBER	
2.1	30308025	SET SCREW M8X25 A2 DIN 933	4
2.2	30806	LOOSE FOOT PLATE FOR CONCRETE	1
2.3	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	4
2.4	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	4
3	38910	STABILIZATION POST H58 CM	1
4	2700286	MOUNTING KIT FOR STABILIZATION POST ON PLATE	
4.1	30308030	SET SCREW M8X30 A2 DIN 933	3
4.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	3
4.3	35600037	FLAT WASHER Ø8.4X16X1.6 MM A2 DIN 125A	6

Stainless steel product Inn-O-Flex fiber H735

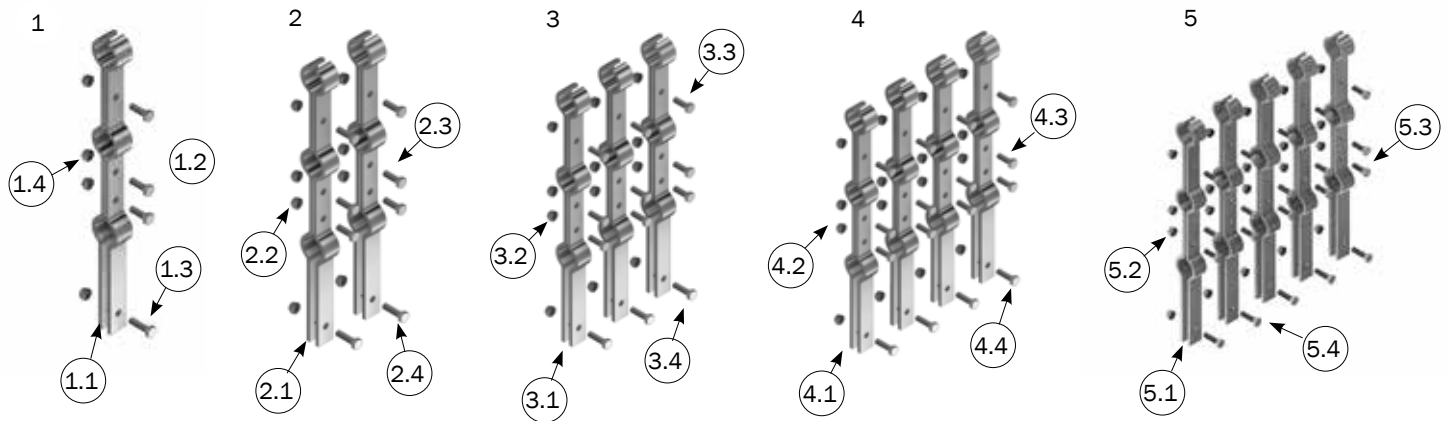


No.	Item. No	Description	Pcs.
1	4500581	1 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS ON PLATE	
1.1	4550944	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL	2
1.2	30308025	SET SCREW M8X25 A2 DIN 933	3
1.3	30308030	SET SCREW M8X30 A2 DIN 933	1
1.4	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	4
2	4500582	2 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS ON PLATE	
2.1	4550944	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL	4
2.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	8
2.3	30308025	SET SCREW M8X25 A2 DIN 933	6
2.4	30308030	SET SCREW M8X30 A2 DIN 933	2
3	4500583	3 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS ON PLATE	
3.1	4550944	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL	6
3.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	12
3.3	30308025	SET SCREW M8X25 A2 DIN 933	9
3.4	30308030	SET SCREW M8X30 A2 DIN 933	3
4	4500584	4 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS ON PLATE	
4.1	4550944	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL	8
4.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	16
4.3	30308025	SET SCREW M8X25 A2 DIN 933	12
4.4	30308030	SET SCREW M8X30 A2 DIN 933	4
5	4500585	1 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS ON PLATE	
5.1	4550944	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL	10
5.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	20
5.3	30308025	SET SCREW M8X25 A2 DIN 933	15
5.4	30308030	SET SCREW M8X30 A2 DIN 933	5



No.	Item. No	Description	Pcs.
	4650410	3 PIPES 1" STAINLESS STEEL PRICE PER . METER	
1	06903402	STAINLESS STEEL PIPE 1"	3

Stainless steel product Inn-O-Flex fiber H642

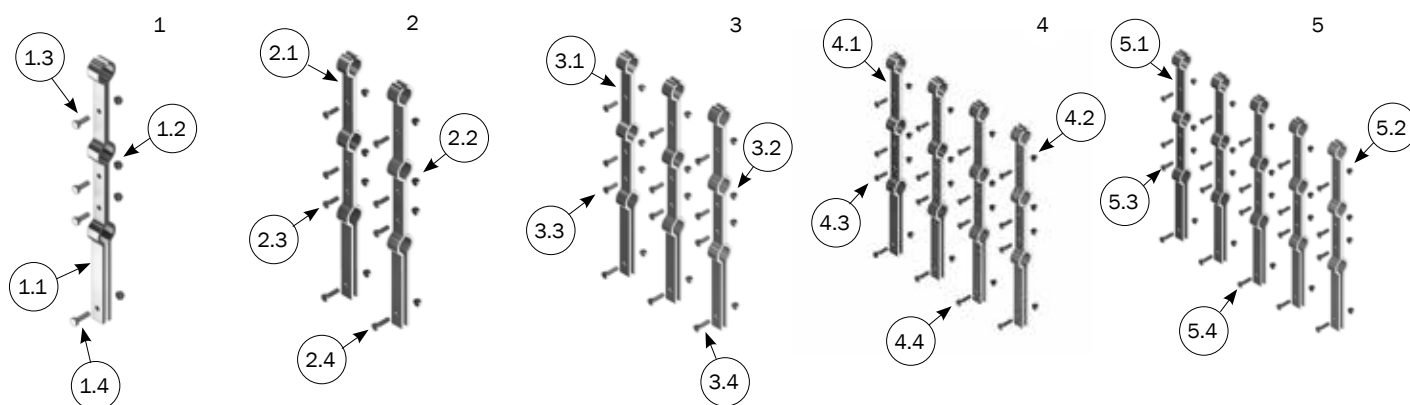


No.	Item. No	Description	Pcs.
1	4500751	1 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS INN-O-FIBER	
1.1	4550053	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL INN-O-FIBER	2
1.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	4
1.3	30308025	SET SCREW M8X25 A2 DIN 933	3
1.4	30308030	SET SCREW M8X30 A2 DIN 933	1
2	4500752	2 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS INN-O-FIBER	
2.1	4550053	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL INN-O-FIBER	4
2.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	8
2.3	30308025	SET SCREW M8X25 A2 DIN 933	6
2.4	30308030	SET SCREW M8X30 A2 DIN 933	2
3	4500753	3 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS INN-O-FIBER	
3.1	4550053	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL INN-O-FIBER	6
3.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	12
3.3	30308025	SET SCREW M8X25 A2 DIN 933	9
3.4	30308030	SET SCREW M8X30 A2 DIN 933	3
4	4500754	4 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS INN-O-FIBER	
4.1	4550053	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL INN-O-FIBER	8
4.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	16
4.3	30308025	SET SCREW M8X25 A2 DIN 933	12
4.4	30308030	SET SCREW M8X30 A2 DIN 933	4
5	4500755	5 PCS STIFFENING BRACKET SET STAINLESS STEEL FOR 3 BARS INN-O-FIBER	
5.1	4550053	STIFFENING BRACKET 3 TOP BARS STAINLESS STEEL INN-O-FIBER	10
5.2	33908001	LOCK NUT M8 A2 DIN 985 WAX-TREATED	20
5.3	30308025	SET SCREW M8X25 A2 DIN 933	15
5.4	30308030	SET SCREW M8X30 A2 DIN 933	5



No.	Item. No	Description	Pcs.
	4650410	3 PIPES 1" STAINLESS STEEL PRICE PER . METER	
1	06903402	STAINLESS STEEL PIPE 1"	3

Rules

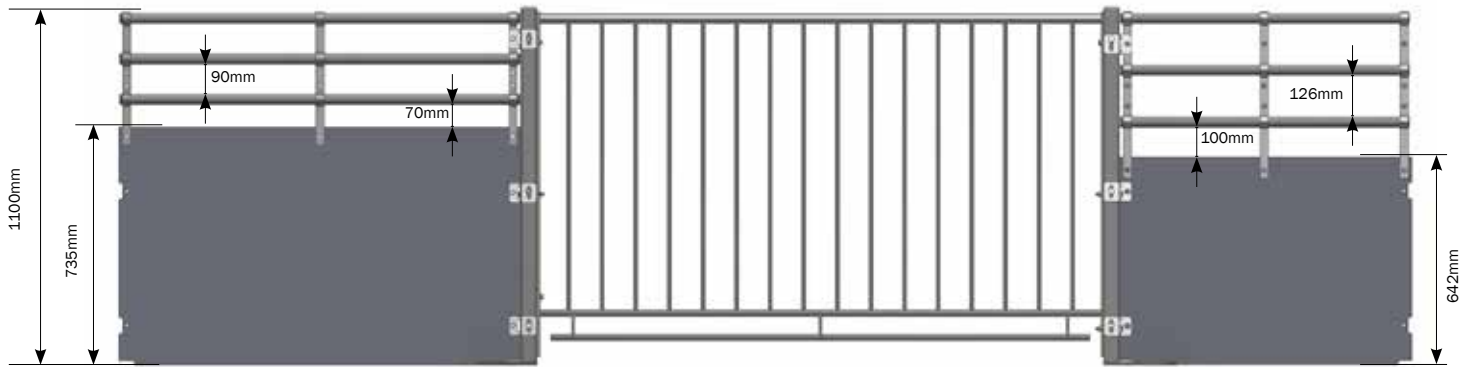


Can be integrated with partitions of varying heights.

Additional accessories




29710
Support wheels. Used for a long gate

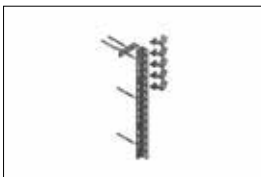

1200362
Fitting for pen front bars against wall



1900250
Stainless steel pipe

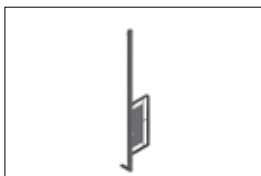

4000893
High post with front rail



4000892
Low post with front rail